
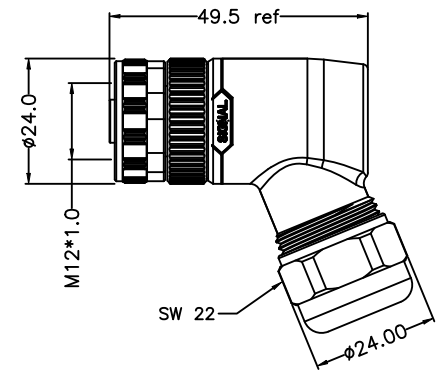


REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2023/02/21	ZK
S1	DRAWING UPDATES	2024/06/25	CBT

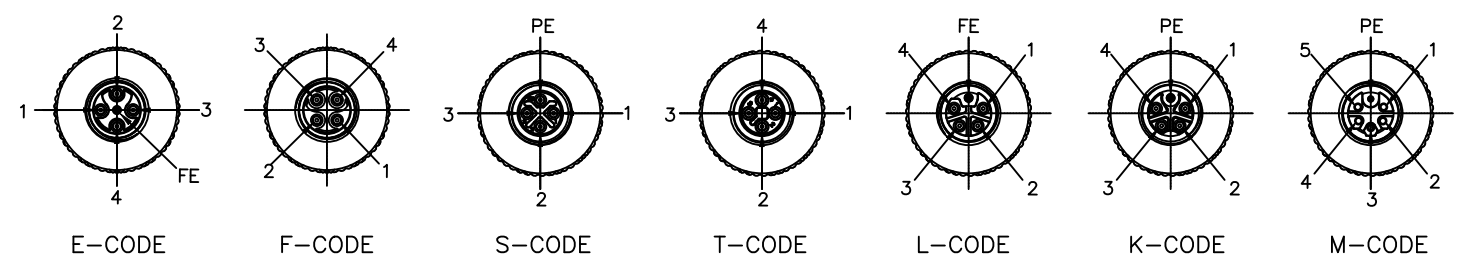

Detailed Product Description:
Waterproof connector rating is IP67
They can not be used permanently under water
Per ISO-20653,IEC60529

Electrical character
Insulation resistance: >100MΩ
Contact resistance: ≤10mΩ


Other Specification
Contact Pin: Copper alloy with gold-plated
Insulation plastic: PA66
Cable peeling: (covering: 30mm, Conductor: 5mm)
Cable OD: 8.0~12.0mm(2 types of waterproof hoses)
Mechanical characteristics: mating / cycle >100cycle
Operating temperature: -25°C ~ +85°C


TERMINAL:SCREW


Electrical character

*ALL MATERIALS ARE RoHS COMPLIANT.

Part Number	CODE	Contacts	Function	Pin ϕ (mm)	Rated voltage		Rated current	Rated impulse voltage
					A/C	D/C		
121005-02-020	L		4+FE	1.5	63V	63V	16A	1.5KV
121305-02-007	K		4+PE	1.5	630V	630V	12A	6KV
121406-02-003	M		5+PE	1.0	630V	630V	8A	6KV
120504-02-010	S		3+PE	1.5	630V	630V	12A	6KV
120503-02-003	S		2+PE	1.5	630V	630V	12A	6KV
120604-02-010	T		4	1.5	63V	63V	12A	1.5KV
121105-02-003	E		4+FE	1.5	63V	63V	16A	1.5KV
121204-02-003	F		4	1.5	63V	63V	16A	1.5KV

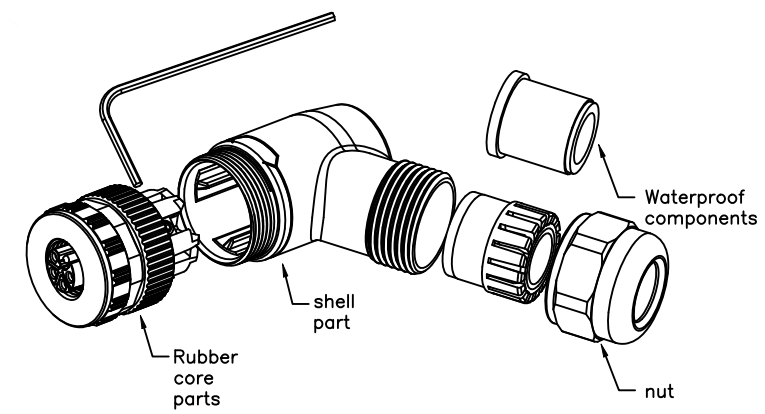

 SIGNAL®		TITLE M12 FEMALE PLASTIC ASSEMBLY CONNECTOR		
Shenzhen Signal Electronics Co., LTD		SGN NO	SEE TABLE	REV.
DRAWN BY	DATE	DWG NO		
CHECKED BY	DATE	CUSTOMER		S1
CHECKED BY	DATE			
APPROVED BY	DATE			
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		TOLERANCES ARE:		THIRD ANGLE PROJECTION
		DECIMALES	ANGLES	
		.x ±0.5	x.° ±2.0°	SIZE: A4
		.xx ±0.20	.x.° ±1.0°	UNITS: mm
				SCALE:
				SHEET: 1 OF