

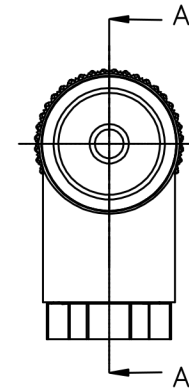
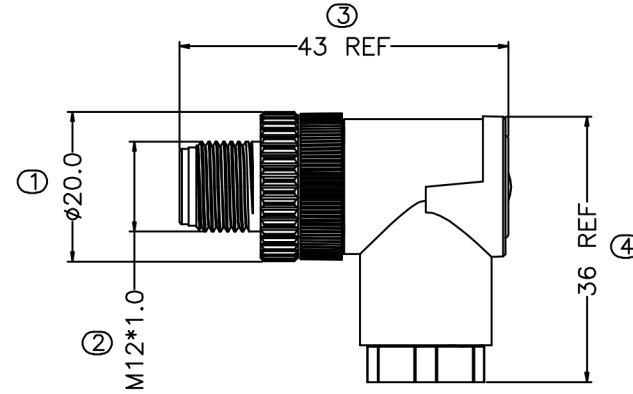



REV	DESCRIPTION	DATE	APPROVED
A0	CREATED DRAWING	2022/08/06	ZK

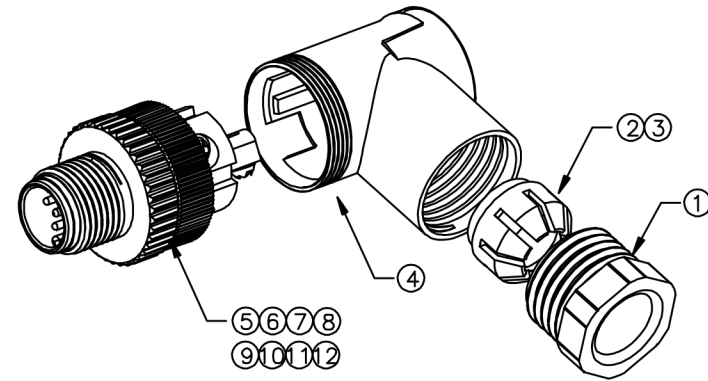

- 说明:
- 1.电气特性
额定电压: 交流/直流60V
额定电流: 4A
连接器的接触电阻 $\leq 10\text{m}\Omega$
绝缘电阻: $> 100\text{M}\Omega$
 - 2.机械特性
插拔/周期 > 100 cycle
 - 3.环境特性
防护等级: IP67
操作温度: $-25^{\circ}\text{C} \sim + 85^{\circ}\text{C}$
 - 4.所有材料都符合 RoHS标准。
 - 5.用吸塑盒包装。



 SIGNAL®		TITLE M12 A 5P MALE PLASTIC ASSEMBLY CONNECTOR(PG9)	
Shenzhen Signal Electronics Co., LTD		SGN NO 120105-01-004	REV.
DRAWN BY	DATE	DWG NO SGN01117-036	A0
CHECKED BY	DATE	CUSTOMER MC5E7	
CHECKED BY	DATE		
APPROVED BY	DATE	TOLERANCES ARE: DECIMALES .x ± 0.5 .xx ± 0.20	THIRD ANGLE PROJECTION SIZE: A4 SCALE:
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		ANGLES x.' $\pm 2.0^{\circ}$ x.' $\pm 1.0^{\circ}$	UNITS: mm SHEET: 1 OF 1