

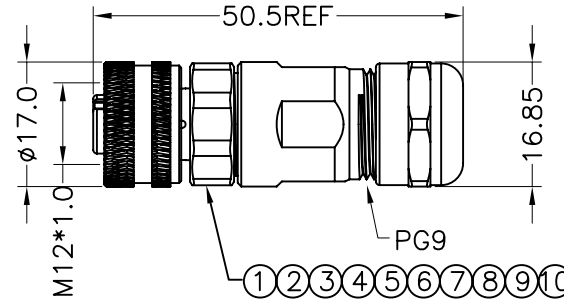


REV	DESCRIPTION	DATE	APPROVED
A0	CREATED DRAWING	2018/04/03	YMX

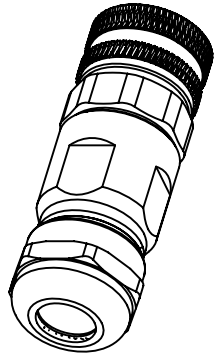

说明:

- 电气特性
额定电压: 交流/直流250V,
绝缘电阻: > 100MΩ
额定电流:4A
连接器的接触电阻≤5mΩ
- 机械特性: 插拔/周期 >100 cycle
- 环境特性
防护等级: IP68
操作温度: -25°C ~ + 85°C
- 所有材料都符合RoHS标准。

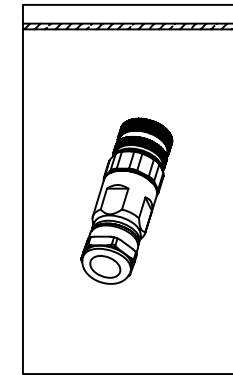

防静电袋, 单PCS包装

ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT
⑩	N/A	黑色环氧树脂(无卤)	2	g
⑨	TE00061	M12 D/A TYPE 母端子镀金1u" 线端 Ø1.0mm	4	PCS
⑧	CN00075-1	M12 D TYPE 黑色TPU 母胶芯 针孔 4*1.95mm(无卤)	1	PCS
⑦	OR00007-1	黑色防水胶硅胶圈, Ø10.0*Ø1.5mm(无卤)	3	PCS
⑥	OR00012-3	M12 母头黑色无卤硅胶 防水胶圈 Ø7.00*1.5mm	1	PCS
⑤	OR00006-1	黑色防水塞 M16*1.5mm 胶芯+芯套PG9防水喉(无卤)	1	PCS
④	WK00072	装配式尾部锁线螺帽 6~8(M12 PG9)	1	PCS
③	WK00034	M12 黄铜镀镍线端母头装配式卡扣 Ø16.63*8.6*9.05mm OD=6~8mm	1	PCS
②	WK00032	M12 黄铜镀镍线端母头装配式螺母 Ø17.0*10.5mm OD=6~8mm	1	PCS
①	WK00035	M12 黄铜镀镍线端装配式主体 Ø25.85*17.0mm OD=6~8mm	1	PCS

 SIGNAL® Shenzhen Signal Electronics Co., LTD		TITLE M12 D 4P/F ASSEMBLY CONNECTOR	
DRAWN BY		SGN NO 120404-02-007	REV.
CHECKED BY		DWG NO SGN01232-437	A0
APPROVED BY		CUSTOMER SM12-PVC-D4F-1B9-HF	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		TOLERANCES ARE:	THIRD ANGLE PROJECTION
		DECIMALES	ANGLES
		.x ±0.15	x.' ±1.0'
		.xx ±0.10	.x' ±0.5'
		SIZE: A4	UNITS: mm
		SCALE:	SHEET: 1 OF 1