


REV	DESCRIPTION	DATE	APPROVED
A0	CREATED DRAWING	2022/06/07	ZK

- 说明:
- 1.电气特性
 额定电压: 交流/直流250V
 绝缘电阻: > 100MΩ
 额定电流: 4A
 连接器的接触电阻≤10mΩ
 - 2.机械特性
 插拔/周期 >100 cycle
 - 3.环境特性
 防护等级: IP67
 操作温度: -25℃ ~ + 85℃
 - 4.其他特性
 接触针: 磷铜镀金
 绝缘塑料: PA66+GF
 - 5.所有材料都符合RoHS标准
 - 6.用吸塑盒按要求R&D-WI-0174包装。

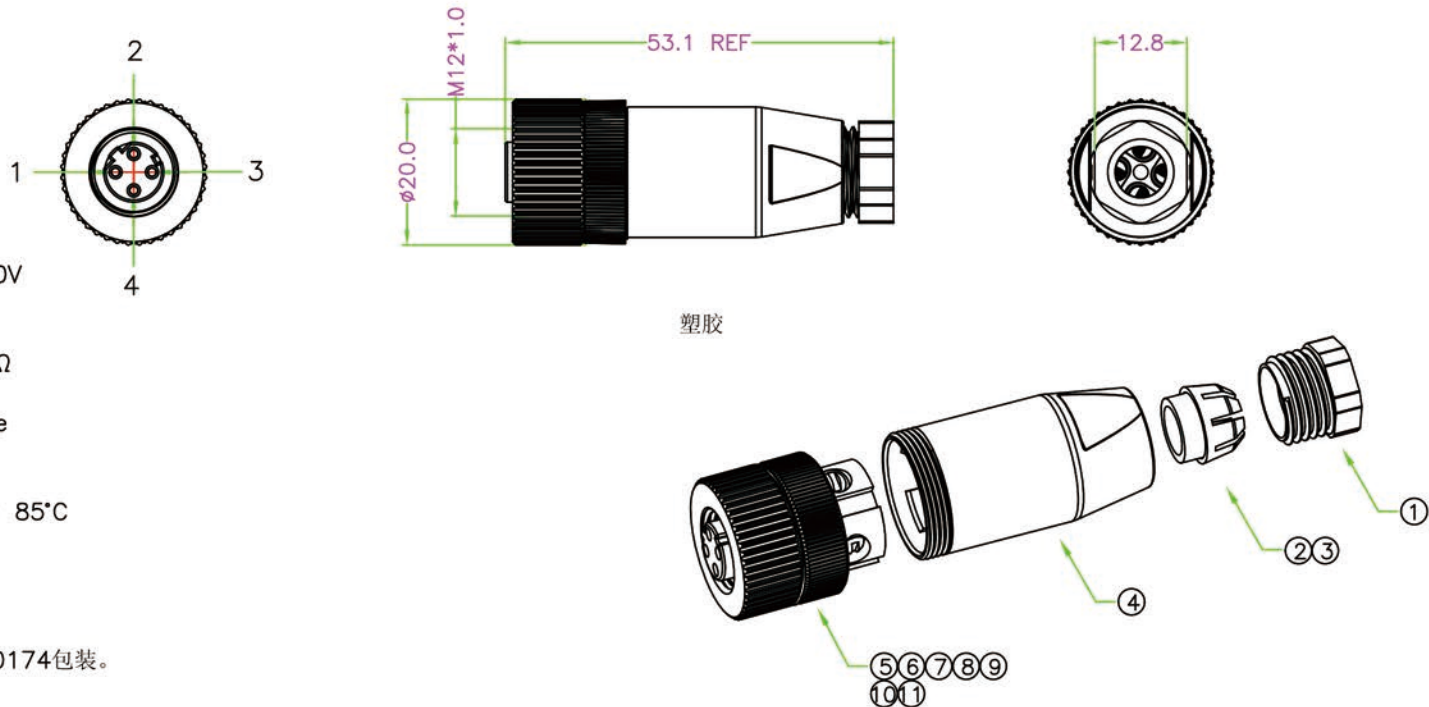

 ShenZhen Signal Electronics co.,Ltd	TITLE M12 D型4芯母头装配式(M12*1.0 塑胶 PG7)	
	SGN NO 120404-02-001	REV. A0
DRAWN BY	DATE	DWG NO SGN01042-649
CHECKED BY	DATE	CUSTOMER 858FD04-203RAUI
CHECKED BY	DATE	
APPROVED BY	DATE	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		TOLERANCES ARE:
		DECIMALES ANGLES
		.x ±0.5 x.' ±2.0'
		.xx ±0.20 .x' ±1.0'
		THIRD ANGLE PROJECTION
		SIZE: A4 UNITS: mm
		SCALE: SHEET: 1 OF 1