
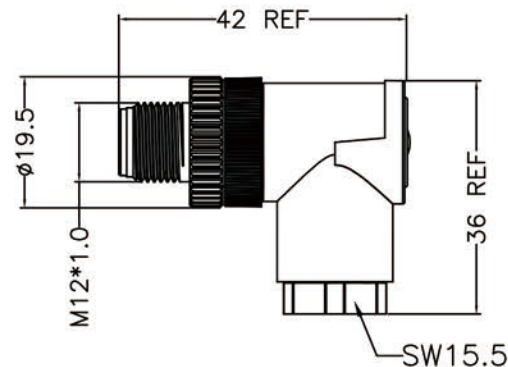


REV	DESCRIPTION	DATE	APPROVED
A0	CREATED DRAWING	2022/03/29	ZK



说明:

1.电气特性

额定电压: 交流/直流250V

额定电流: 4A

连接器的接触电阻 $\leq 10\text{m}\Omega$

绝缘电阻: $> 100\text{M}\Omega$

2.机械特性



插拔/周期 > 100 cycle

3.环境特性

防护等级: IP67

操作温度: $-25^{\circ}\text{C} \sim + 85^{\circ}\text{C}$

4.所有材料都符合RoHS标准。

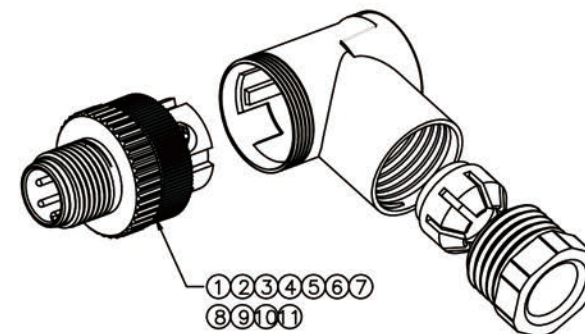

Shenzhen Signal Electronics Co., LTD

DRAWN BY	DATE
CHECKED BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE M12 A 4P MALE PLASTIC ASSEMBLY CONNECTOR(PG9)

SGN NO	120104-01-004	REV.
DWG NO	SGN01014-769	A0
CUSTOMER		

TOLERANCES ARE:	THIRD ANGLE PROJECTION
DECIMALES	ANGLES
.x ± 0.5	x.' $\pm 2.0^{\circ}$
.xx ± 0.20	.x' $\pm 1.0^{\circ}$
SIZE: A4	UNITS: mm
SCALE:	SHEET: 1 OF 1