
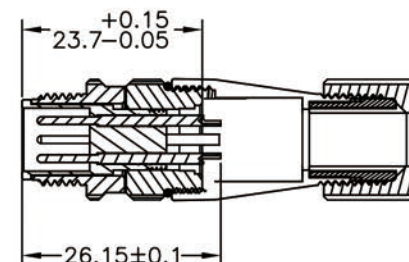
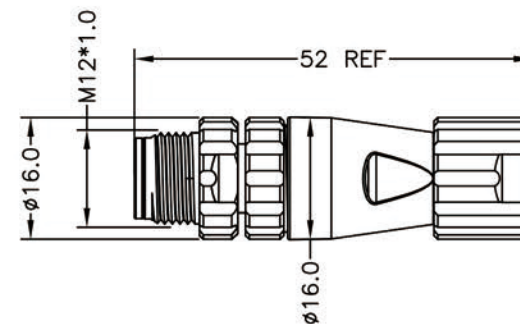


REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图
S0	CREATED DRAWING	2023/08/17	ZK



注:

1. 电气特性
导通阻抗: 5Ω
额定电压: 交流/直流60v,
绝缘电阻: $> 100M\Omega$
额定电流: 4A
连接器的接触电阻 $\leq 10m\Omega$
2. 机械特性: 插拔/周期 >100 cycle
3. 环境特性
防护等级: IP67
操作温度: $-25^{\circ}C \sim +85^{\circ}C$
4. 所有材料都符合RoHS标准。

 SIGNAL® Shenzhen Signal Electronics Co., LTD		TITLE M12 3P/M A TYPE CONNECTOR	
		SGN NO 120103-01-026	REV. A0
DRAWN BY	DATE	DWG NO	
CHECKED BY	DATE	CUSTOMER	
APPROVED BY	DATE	TOLERANCES ARE:	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		DECIMALES .x ± 0.15 .xx ± 0.10	ANGLES x° $\pm 1.0^{\circ}$ x' $\pm 0.5'$
		THIRD ANGLE PROJECTION SIZE: A4 SCALE:	UNITS: mm SHEET: 1 OF 1