

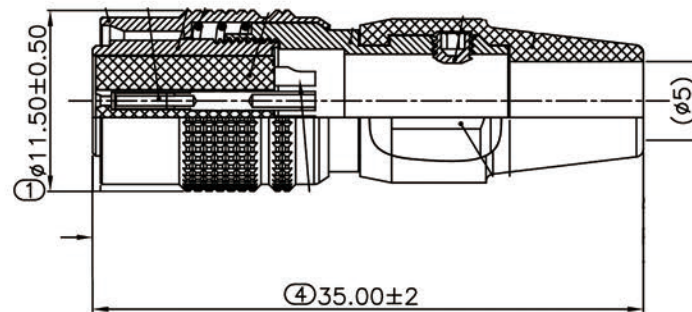


REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2022/02/22	ZCH



Detailed product description:

Connector electrical character

Rating voltage: 100V AC, 140V DC,

Rating current : 2A

Insulation resistance: >1000M ohms

Contact resistance of connector ≤10m ohms

Dielectric withstanding voltage: 300V AC R.M.S.Max.

Mechanical characteristics:

Mating cycles >500 cycles


Operating temperature: -25°C ~ +85°C


Storage temperature: -10°C ~ +60°C

Cable OD: Ø5.0mm

Applicable Wire: 0.15mm²(26AWG),

*All materials are RoHS compliant.

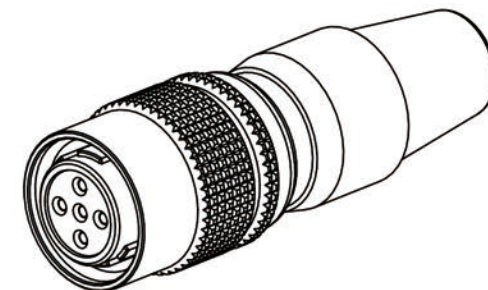

 SIGNAL® Shenzhen Signal Electronics co.,Ltd		TITLE		PUSH PULL 5PIN PLUG (SOLDER TYPE)	
		SGN NO	950105-21-001		REV.
DRAWN BY	DATE	DWG NO			
CHECKED BY	DATE	CUSTOMER			
CHECKED BY	DATE			S0	
APPROVED BY	DATE	TOLERANCES ARE:		THIRD ANGLE PROJECTION	
		DECIMALES	ANGLES		
		.x ±0.5	x.* ±2.0°		
		.xx ±0.20	.x.* ±1.0°		
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.</small>		SIZE: A4	UNITS: mm		
		SCALE: 1:1	SHEET: 1 OF 1		