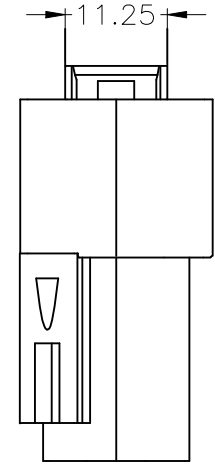
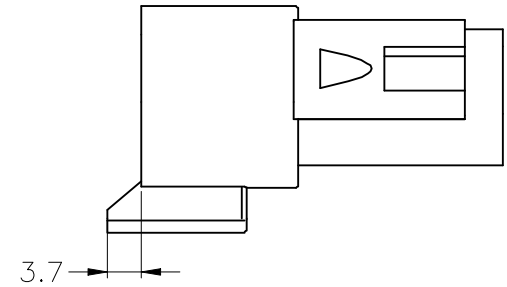

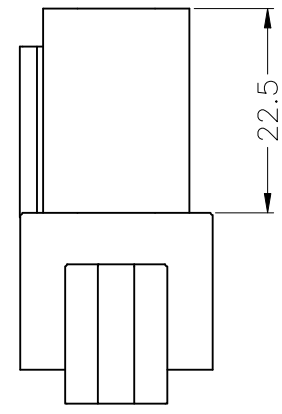
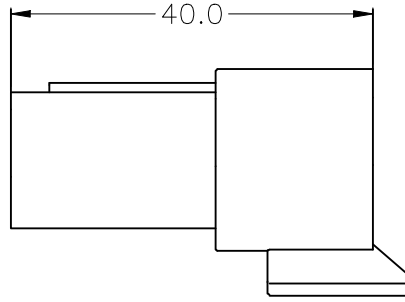


UNMARKED TOLERANCES	
SIZE	TOLERANCE
<4	±0.2
4~8	±0.25
8~16	±0.3
16~32	±0.4
32~63	±0.5

REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2024/03/22	ZK
S1	CREATED DRAWING	2025/07/20	GZQ
S2	CREATED DRAWING	2025/07/28	GZQ





Detailed Product Description:
 Products comply with SKGY0013-2005

- Smooth surface, no burrs, cracks and other defects
- Mechanical characteristics: mating/cycle >50cycle
- Operating temperature: -40°C ~ +85°C

Other Specification
 Insulation plastic: PA66+15%GF Color: Gray
 Internal plug-ins: PA66+15%GF Color: Green
 Waterproof rubber plug: Silicone Color: Dark Red
 Packing: PE Bag

*ALL MATERIALS ARE RoHS COMPLIANT.

 SIGNAL® ShenZhen Signal Electronics co.,Ltd		TITLE SDT04-3P CONNECTOR HOUSING	
		SGN NO YDHS0443	REV. S2
DRAWN BY	DATE	DWG NO	CUSTOMER
CHECKED BY	DATE	TOLERANCES ARE:	
CHECKED BY	DATE	DECIMALES	ANGLES
APPROVED BY	DATE	THIRD ANGLE PROJECTION	
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.</small>		<small>x: ±2.0°</small> <small>.x: ±1.0°</small>	 <small>SIZE: A4</small> <small>UNITS: mm</small> <small>SCALE: 1:1</small> <small>SHEET: 1 OF 1</small>