
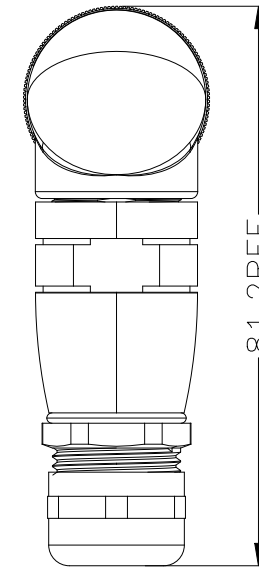
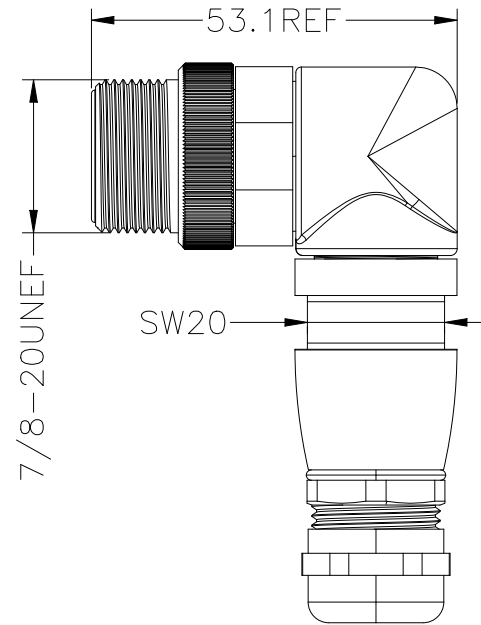
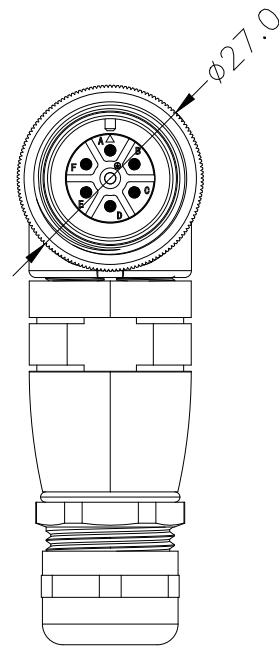



REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2026/09/14	LJJ

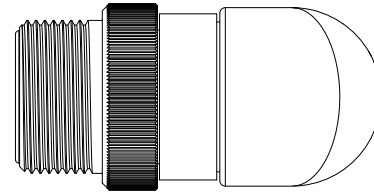


Detailed Product Description:
Waterproof connector rating is IP67
(After the lock is correctly matched)

Connector Electrical character
Rating voltage: 250V
Rating current: 10A
Insulation resistance: $>100M\Omega$
Contact resistance of the connector $\leq 10m\Omega$

Other Specification
Contact PIN: Silver-plated brass
Coupling nut/screw: Brass with nickel plating
Nickel-plated aluminum alloy
Insulation plastic: PA66+GF
Operating temperature: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

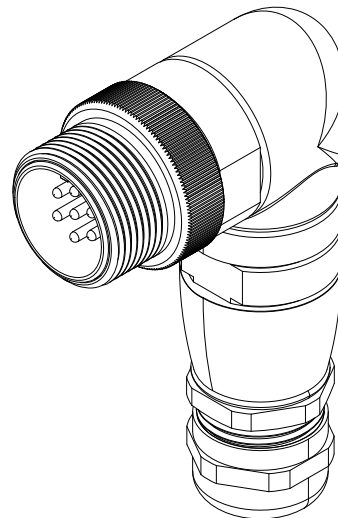

Cable OD 3~9.5(mm)

 SIGNAL®		TITLE EN07 6+PE MALE 90° ELBOW, MODULAR CONNECTOR	
Shenzhen Signal Electronics Co., LTD		SGN NO	REV.
DRAWN BY	DATE	DWG NO HSGNN2606011-6	S0
CHECKED BY	DATE	CUSTOMER	
CHECKED BY	DATE		
APPROVED BY	DATE	TOLERANCES ARE: DECIMALES ANGLES .x ±0.5 x.' ±2.0" .xx ±0.20 .x' ±1.0"	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		THIRD ANGLE PROJECTION	
		SIZE: A4	UNITS: mm
		SCALE: 1:1	SHEET: 1 OF 1

*ALL MATERIALS ARE RoHS COMPLIANT.