

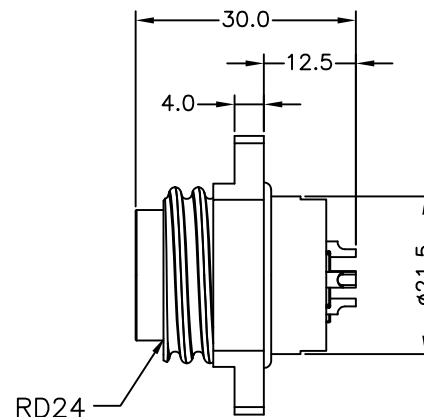


PROJECT NO:		REV		DESCRIPTION		DATE		APPROVED	
SGNYD2204032		S0		CREATED DRAWING		2024/05/06		CYF	

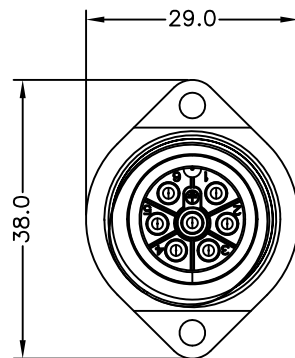



Detailed Product Description:
Waterproof connector rating is IP67
They can not be used permanently under water
Per ISO-20653, IEC60529

Electrical character
Rating voltage: 250 AC/DC
Insulation resistance: >100MΩ
Rating current: 8A
Contact resistance of connector ≤10mΩ
Mechanical characteristics: mating cycle >100cycles
Operating temperature: -40°C ~ +85°C

ALL MATERIALS ARE RoHS COMPLIANT

Solder (18AWG~22AWG)

③	N/A	O-RING NBR BLACK	1	SET
②	N/A	TERMINAL FEMALE COPPER ALLOY GOLD PLATING 3u"	1	SET
①	N/A	PLASTIC SHELL NYLON BLACK	1	SET
ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT

 SIGNAL®		TITLE RD24 6+PE MALE PANEL CONNECOTR SOLDER			
ShenZhen Signal Electronics co., Ltd		SGN NO 240007-03-004			
DRAWN BY	DATE	DWG NO	REV.		
CHECKED BY	DATE	CUSTOMER	S0		
CHECKED BY	DATE				
APPROVED BY	DATE	TOLERANCES ARE:			
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		DECIMALES	ANGLES	THIRD ANGLE PROJECTION	
		.x ±0.5	x.* ±2.0°	SIZE: A4	UNITS: mm
		.xx ±0.20	.x' ±1.0°	SCALE: 1:1	SHEET: 1 OF 1