


REV	DESCRIPTION	DATE	APPROVED
S1	CREATED DRAWING	2022/06/21	ZK
S2	UPDATE DRAWING	2023/11/06	ZK

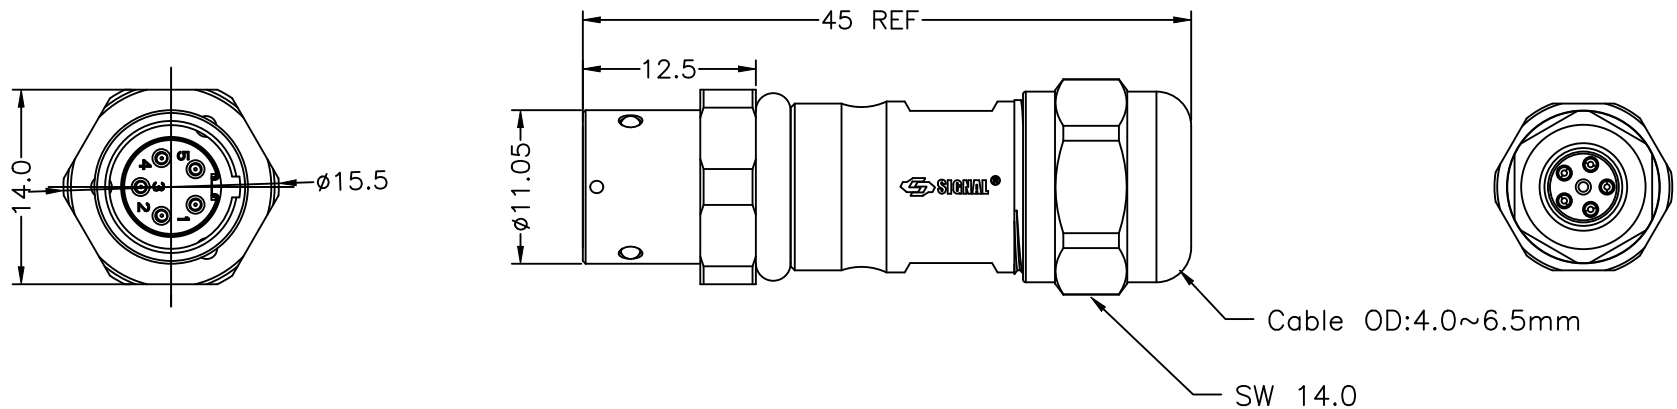


Detailed Product Description:
 Waterproof connector rating is IP67
 They can not be used permanently under water
 Per ISO-20653,IEC60529



Electrical character
 Rating voltage: 180V AC/DC
 Insulation resistance: >5000MΩ
 Rating current: 5A
 Contact resistance ≤10mΩ

Other Specification
 Contact PIN: Phosphor bronze with Gold plating.
 Coupling nut/screw: Brass
 Insulation plastic: TPU
 Operating temperature: -25°C ~ +85°C

*ALL MATERIALS ARE RoHS COMPLIANT.

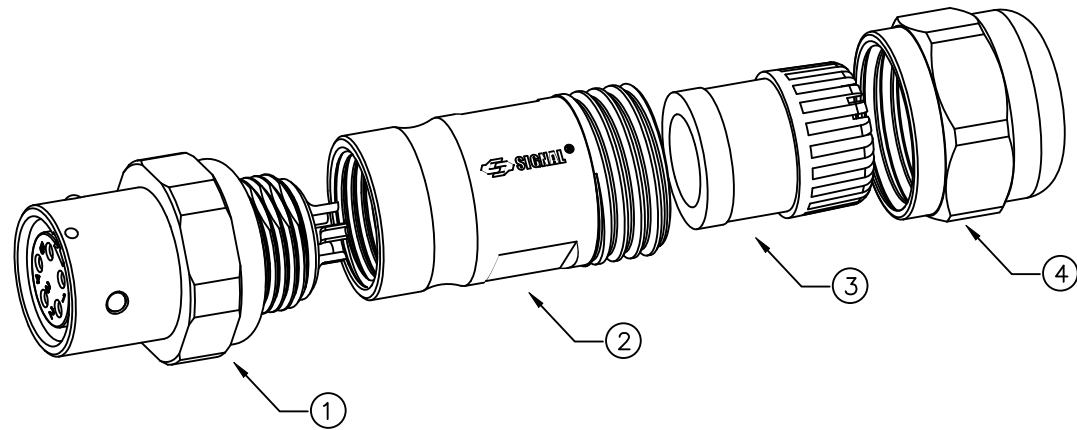

④	N/A	TAIL NUT	1	SET
③	N/A	TAIL WATERPROOF PARTS	1	SET
②	N/A	METAL ASSEMBLY SHELL	1	SET
①	N/A	5PIN FEMALE PANEL CONNECTOR	1	SET
ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT

 ShenZhen Signal Electronics co.,Ltd		TITLE 5P/F REAR FASTENED CONNECTOR	
		SGN NO	940005-04-002
		DWG NO	SGNYD2205025-1
		CUSTOMER	22070173
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		TOLERANCES ARE: DECIMALES ANGLES .x ±0.2 x.° ±2.0° .xx ±0.10 .x.° ±1.0°	THIRD ANGLE PROJECTION 
		SIZE: A4	UNITS: mm
		SCALE:	SHEET: 1 OF 1