

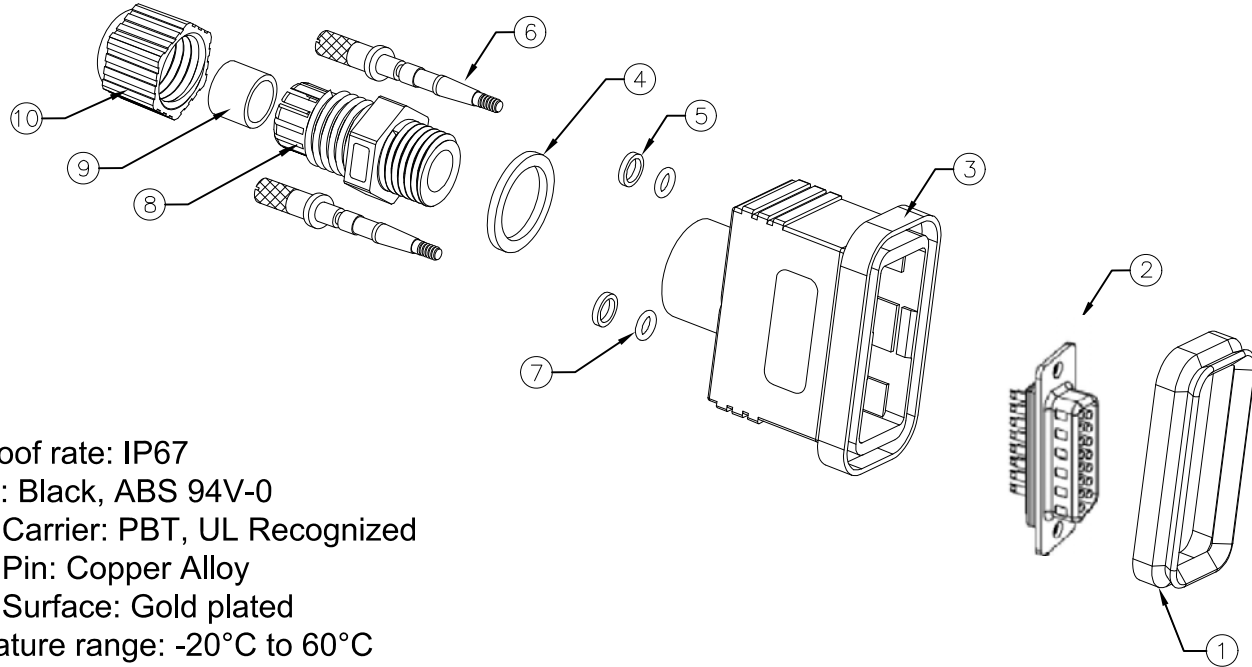
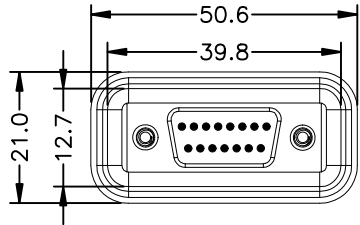


REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2024/09/03	ZCH

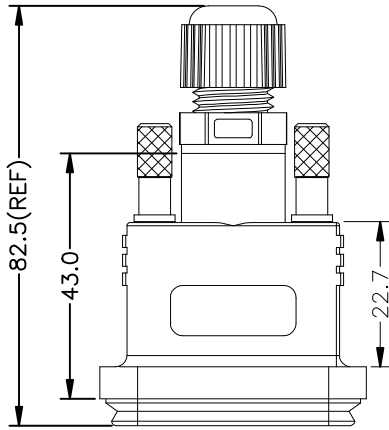

Material:

- Waterproof rate: IP67
- Housing: Black, ABS 94V-0
- Contact Carrier: PBT, UL Recognized
- Contact Pin: Copper Alloy
- Contact Surface: Gold plated
- Temperature range: -20°C to 60°C
- Connector: D-SUB 15pin Male or Male Shielded (solder pin)
- Seals for cable: OD: $\varnothing 6.0\text{mm} \sim \varnothing 10.0\text{mm}$
- One set unassembled in one(1) PE bag

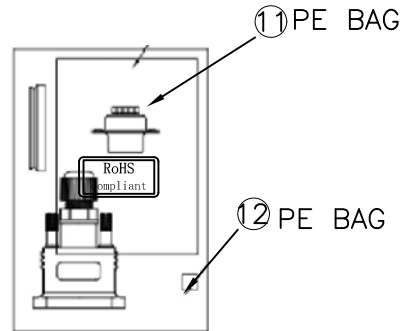

12	N/A	B CODING PE-BAG	1	PCS
11	N/A	A CODING PE-BAG	1	PCS
10	N/A	B CODING SEALING NUT:NYLON,BLACK	1	PCS
9	N/A	SEALS FOR CABLE OD: $\varnothing 6.0\text{MM} \sim \varnothing 10.0\text{MM}$	1	PCS
8	N/A	B CODING BODY:NYLON,BLACK	1	PCS
7	N/A	O-RING:SILICONE,CLEAR	2	PCS
6	N/A	SCREW:BRASS,NICKEL PLATED	2	PCS
5	N/A	GASKET FOR SCREW	2	PCS
4	N/A	B CODING GASKET FOR BODY	1	PCS
3	N/A	B CODING HOUSING:ABS,BLACK	1	PCS
2	N/A	D-SUB 15PIN MALE CONNECTOR	1	PCS
1	N/A	B CODING GASKET FOR HOUSING	1	PCS
ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT

 SIGNAL® Shenzhen Signal Electronics Co., LTD		TITLE DB 15/M Plastic Assembly type (OD:6.0-10.0)	
		SGN NO 910115-01-011	REV.
DRAWN BY		DATE	
CHECKED BY		DATE	
APPROVED BY		DATE	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		TOLERANCES ARE:	
		DECIMALES	ANGLES
		.x ± 0.5	x.' $\pm 2.0^\circ$
		.xx ± 0.20	.x' $\pm 1.0^\circ$
		THIRD ANGLE PROJECTION	
		SIZE: A4	UNITS: mm
		SCALE:	SHEET: 1 OF 1