

说明:

1. 电气特性

额定电压: 交流/直流250V,

绝缘电阻: > 100MΩ

额定电流: 4A

连接器的接触电阻≤5mΩ

2. 机械特性: 插拔/周期 >100 cycle




3. 环境特性

防护等级: IP68

操作温度: -25° C ~ + 85° C

4. 所有材料都符合RoHS标准。


5. 产品单PCS自封袋包装。

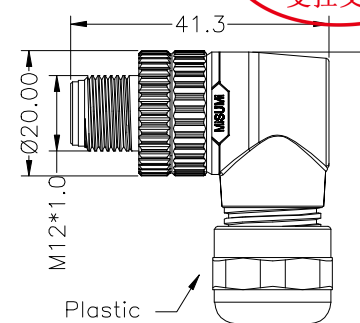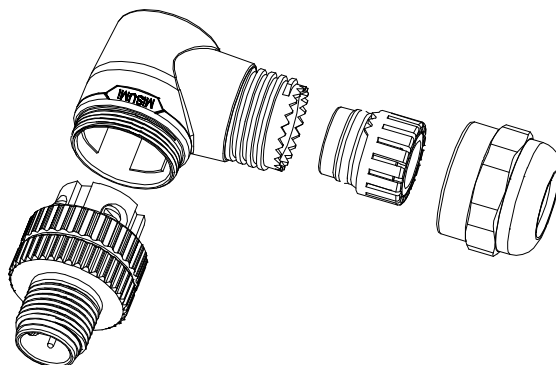


Termination:Screw



⑬	LB00002	白色铜板纸标签 L*W=50*30mm	1	PCS
⑫	CN00426-2	塑胶装配式卡环 蓝色 带客户LOGO"MiSUMi"	1	PCS
⑪	OR00012	M12 母头绿色氟胶材质防水胶圈 Φ7.00*1.5mm	2	PCS
⑩	OR00048	绿色氟胶防水胶圈, Φ10.0*Φ1.5mm	1	PCS
⑨	OR00046	M12尾部密封环Φ11.8*7.5mm 绿色氟胶	1	PCS
⑧	WK00173	M12 铝氧化银公头装配式螺母Ø20*14.6mm	1	PCS
⑦	NU00034	M2.5*0.45 M12装配式螺丝	3	PCS
⑥	CN00253	M12塑胶装配式尾部六角螺母 (PA66+GF黑色)	1	PCS
⑤	CN00252	M12塑胶装配式尾部八爪 (PA66 黑色)	1	PCS
④	CN00284	M12 90度塑胶装配式主体 (PA66+GF黑色)	1	PCS
③	CN00250	M12塑胶装配式固定主体螺母 (PA66+GF黑色)	1	PCS
②	TE00224	Ø1.0公针黄铜镀金, 偏心针 L=23.10mm	3	PCS
①	CN00244	M12 4P/M塑胶装配式胶芯 (PA66+GF黑色)	1	PCS
ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT

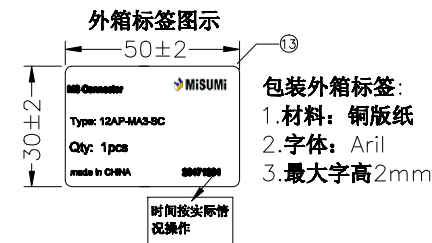

包装外箱标签:
1.材料: 铜版纸
2.字体: Arial
3.最大字高2mm



Shenzhen Signal Electronics Co., LTD

DRAWN BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE M12 A 3P/M assembly angel connector(plastic)

SGN NO 120103-01-024M

DWG NO SGN01038-652

CUSTOMER 12AP-MA3-SC

TOLERANCES ARE: DECIMALES ANGLES

.x ±0.15 x.' ±1.0' .xx ±0.10 .x' ±0.5'

SIZE: A4 UNITS: mm SCALE: SHEET: 1 OF 1

Web: <http://www.sz-signal.com/>

E-mail: saudi@sz-signal.com