



REV	DESCRIPTION	DATE	APPROVED
A0	CREATED DRAWING	2018/06/08	CYF

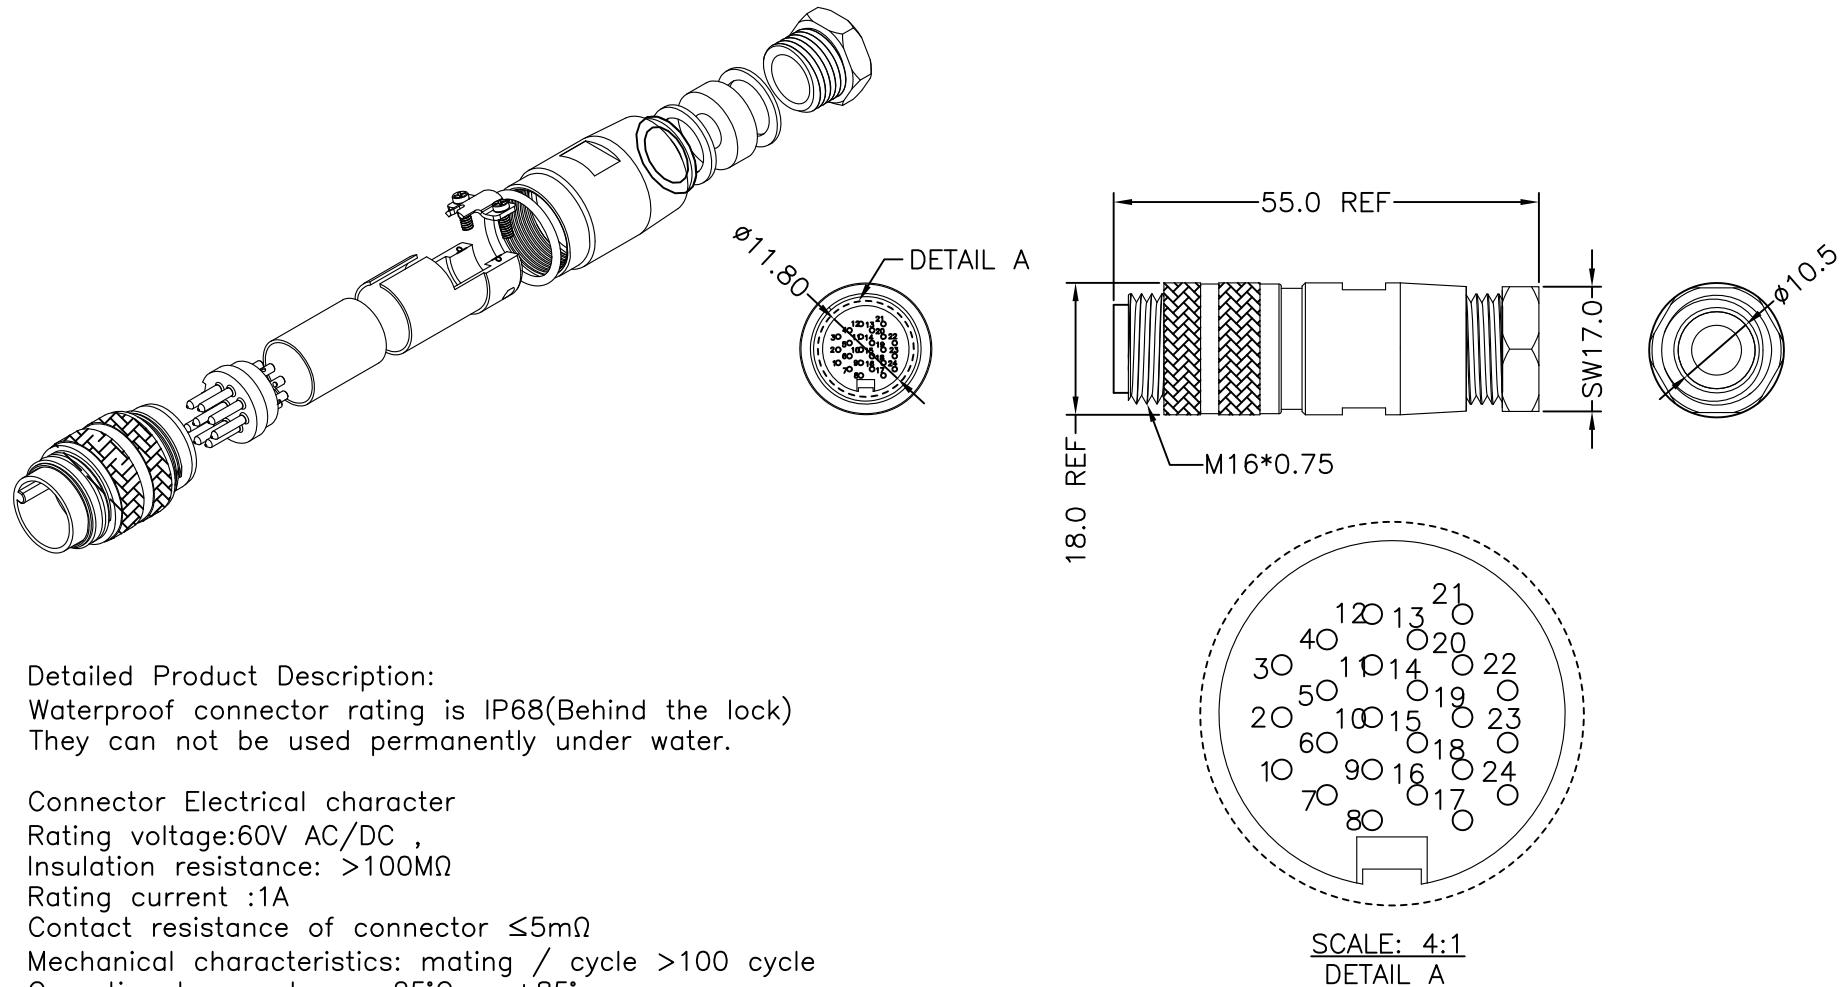

Detailed Product Description:
 Waterproof connector rating is IP68(Behind the lock)
 They can not be used permanently under water.

Connector Electrical character
 Rating voltage:60V AC/DC ,
 Insulation resistance: >100MΩ
 Rating current :1A
 Contact resistance of connector ≤5mΩ
 Mechanical characteristics: mating / cycle >100 cycle
 Operating temperature: -25°C ~ +85°

*ALL MATERIALS ARE RoHS COMPLIANT.

 SIGNAL®		TITLE M16 24P/M ASSEMBLY CONNECTOR	
Shenzhen Signal Electronics Co., LTD		SGN NO 160024-01-002	REV.
DRAWN BY	DATE	DWG NO ASM16M24001	
CHECKED BY	DATE	CUSTOMER	A0
APPROVED BY	DATE	TOLERANCES ARE: DECIMALES ANGLES .x ±0.5 x.° ±2.0° .xx ±0.20 .xx ±1.0°	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		THIRD ANGLE PROJECTION	
		SIZE: A4	UNITS: mm
		SCALE:	SHEET: 1 OF 1

①	N/A	M16 24Pin Male Assembly Connector	1	SET
ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT