
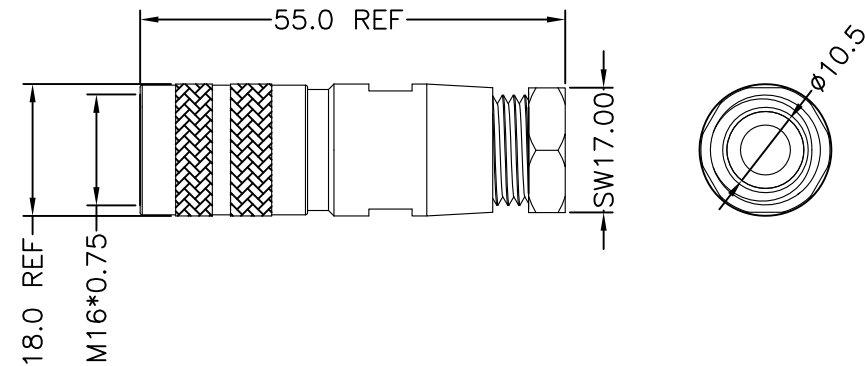


REV	DESCRIPTION	DATE	APPROVED
A0	CREATED DRAWING	2018/06/08	CYF

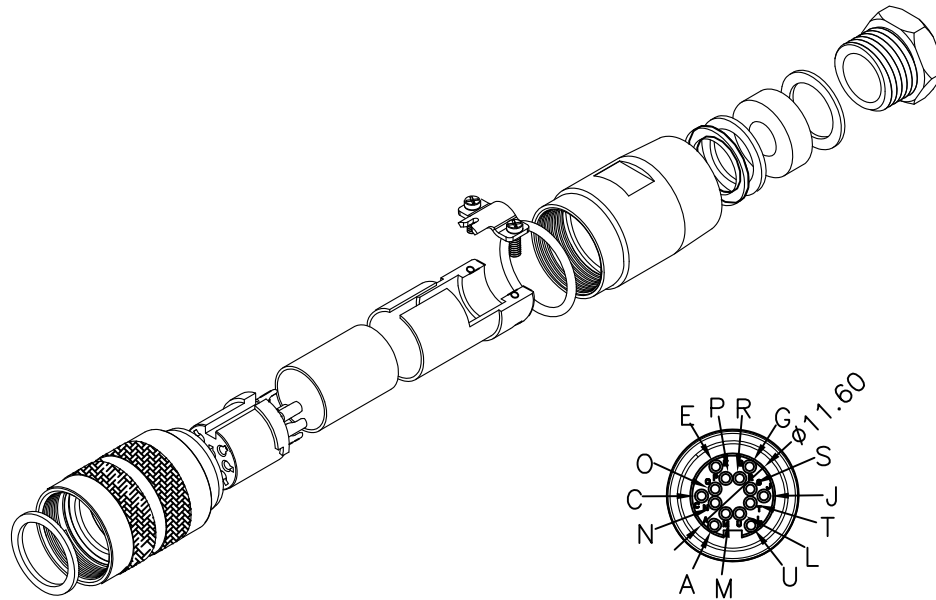

Detailed Product Description:
 Waterproof connector rating is IP68(Behind the lock)
 They can not be used permanently under water.

Connector Electrical character
 Rating voltage:60V AC/DC ,
 Insulation resistance: >100MΩ
 Rating current :3A
 Contact resistance of connector ≤5mΩ
 Mechanical characteristics: mating / cycle >100 cycle
 Operating temperature: -25°C ~ +85°

*ALL MATERIALS ARE RoHS COMPLIANT.

 SIGNAL® Shenzhen Signal Electronics Co., LTD		TITLE M16 14P/F ASSEMBLY CONNECTOR	
DRAWN BY		SGN NO 160014-02-001	REV.
CHECKED BY		DWG NO ASM16F014001	A0
APPROVED BY		CUSTOMER	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		TOLERANCES ARE:	THIRD ANGLE PROJECTION
		DECIMALES	ANGLES
		.x ±0.5	x.' ±2.0'
		.xx ±0.20	.x' ±1.0'
		SIZE: A4	UNITS: mm
		SCALE:	SHEET: 1 OF 1

①	N/A	M16 14Pin Female Assembly Connector	1	SET
ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT