


REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2021/10/26	CYF

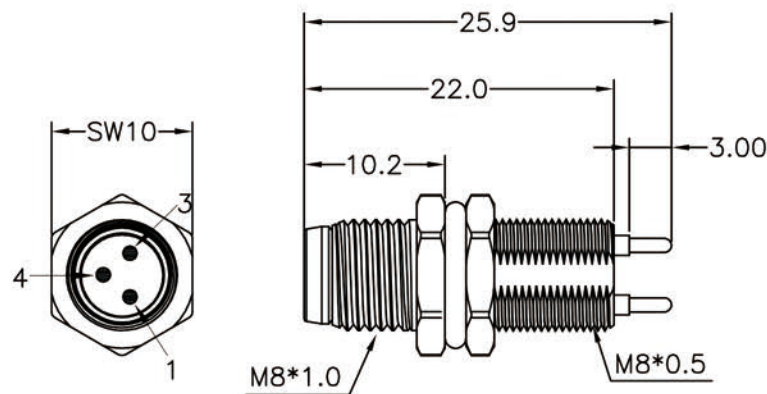

Detailed Product Description:

Waterproof connector rating is IP68

They can not be used permanently under water.

Connector Electrical character

Rating voltage: 60V

Insulation resistance: >100MΩ


Rating current : 3A

Contact resistance of connector ≤5mΩ

Mechanical characteristics: mating / cycle >100 cycles

Operating temperature: -25°C ~ +85°C

*ALL MATERIALS ARE RoHS COMPLIANT.

 SIGNAL® Shenzhen Signal Electronics Co., LTD		TITLE M8 3P/M REAR FASTENED CONNECTOR	
		SGN NO 080103-03-002	REV.
DRAWN BY	DATE	DWG NO	S0
CHECKED BY	DATE	CUSTOMER	
APPROVED BY	DATE	TOLERANCES ARE:	
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.</small>		DECIMALES	THIRD ANGLE PROJECTION
		ANGLES	SCALE:
		.x ±0.5	SIZE: A4
		.xx ±0.20	UNITS: mm
			SHEET: 1 OF 1