

说明:

1.电气特性

额定电压: 交流/直流60v,

绝缘电阻: > 100MΩ

额定电流: 4A

连接器的接触电阻≤5mΩ

2.机械特性: 插拔/周期 >100 cycle



3.环境特性

防护等级: IP67


操作温度: -25°C ~ + 85°C

4.所有材料都符合RoHS标准。

5.用吸塑盒包装。

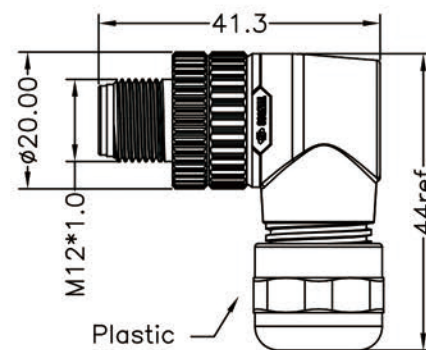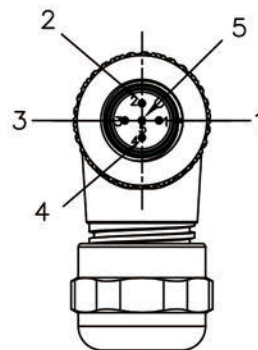

Termination:Screw

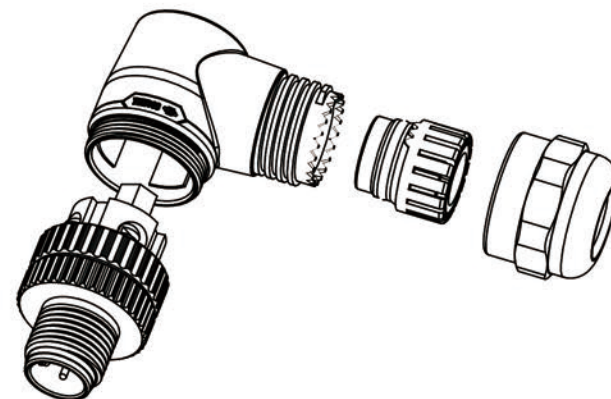

Shenzhen Signal Electronics Co., LTD

DRAWN BY	DATE
CHECKED BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF SIGNAL COMPANY.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN
PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE
M12 A 5P 公弯头装配式(塑胶)

SGN NO 120105-01-024

DWG NO

CUSTOMER

TOLERANCES ARE:

DECIMALES ANGLES

.x ±0.15 .x' ±1.0'
.xx ±0.10 .x' ±0.5'

THIRD ANGLE
PROJECTION

SIZE: A4 UNITS: mm

SCALE: SHEET: 1 OF 1