

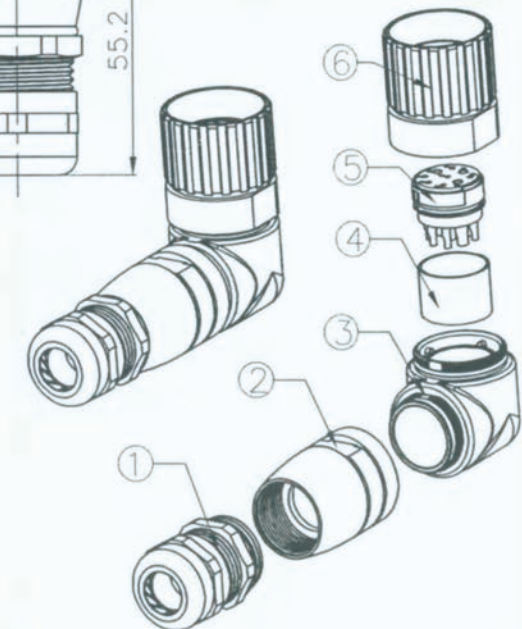
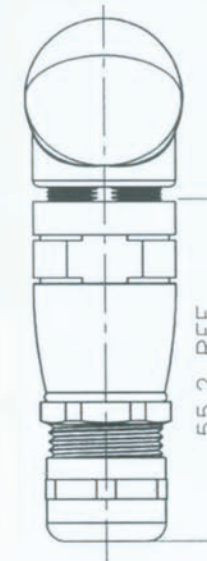


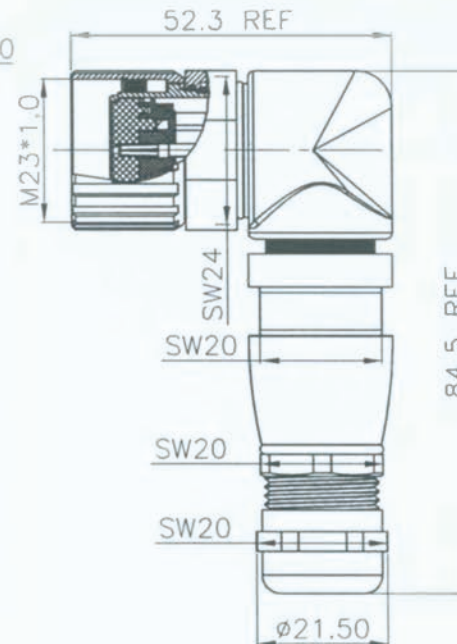

REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2021/12/07	ZCH

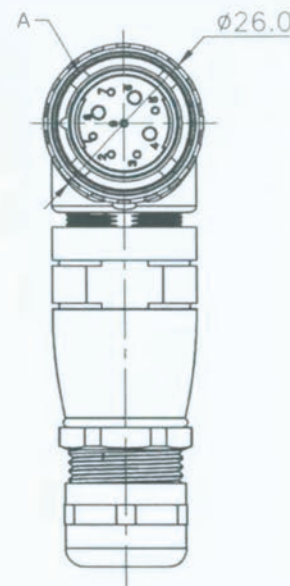

Detailed Product Description:
 Waterproof Connector Rating Is IP67
 They Can Not Be Used Permanently Under Water
 Connector Electrical Character
 Rating Voltage: 250V
 Rating Current : 6*8A/3*20A
 Insulation Resistance: >100M ohms
 Contact Resistance Of Connector ≤5m ohms
 Mechanical Characteristics:
 Mating / Cycle >500 Cycles
 Operating Temperature: -40°C ~ +115°C
 Design From DIN EN60664 AND DIN EN61984
 Cable OD: ø3mm-ø9.5mm
 Applicable Wire: 1.5mm²(16AWG) 2.5mm²(14AWG);
 *All Materials Are RoHS Compliant.

 SIGNAL®		TITLE M23 3+6 PIN FEMALE HEAD METAL ASSEMBLY (M23*1.0, ELBOW)	
Shenzhen Signal Electronics co.,Ltd		SGN NO SGNVD2111115-9	REV.
DRAWING BY	DATE	DWG NO 23209-02-03	S0
CHECKED BY	DATE	CUSTOMER	
CHECKED BY	DATE		
APPROVED BY	DATE	TOLERANCES ARE:	THIRD ANGLE PROJECTION 
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		DECIMALES	ANGLES
		.x ±0.5	x' ±2.0'
		.xx ±0.20	x' ±1.0'
		SIZE: A4	UNITS: mm
		SCALE: 1:1	SHEET: 1 OF 1