



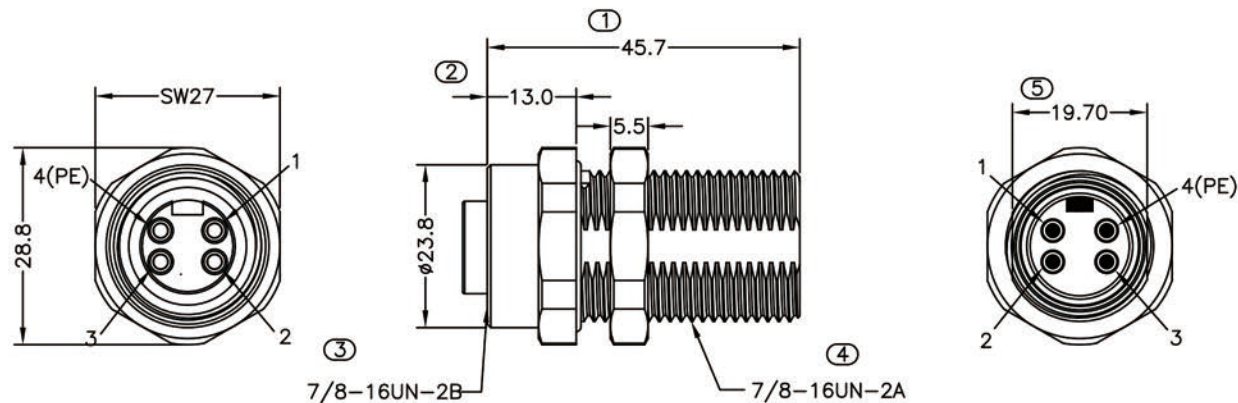

Electrical character

Rated voltage	600V
Rated current	9A
Mechanical characteristics (mating cycle)	>100
Degree of protection (ISO-20653,IEC60529)	IP67
Operating temperature (depending on cable quality)	-25°C~+85°C
Destructive withstand force between connector and overmold exceeds	2.0kgf
Tightening torque (range)	0.4~1.8Nm
Pollution degree	3

ALL MATERIALS ARE RoHS COMPLIANT

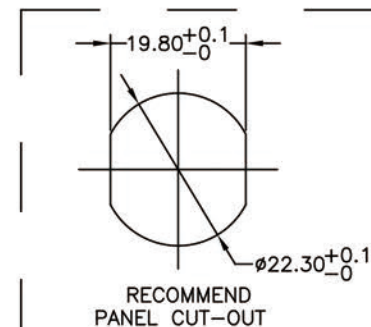

SIGNAL Shenzhen Signal Electronics co.,Ltd		TITLE 7/8 4P M TO F CONNECTOR(METAL)	
DRAWN BY	DATE	SGN NO 780004-10-001	REV. S0
CHECKED BY	DATE	DWG NO	
CHECKED BY	DATE	CUSTOMER	
APPROVED BY	DATE	TOLERANCES ARE: DECIMALES ANGLES .x ±0.50 x.' ±2.0' .xx ±0.20 x.' ±1.0'	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		THIRD ANGLE PROJECTION	SIZE: A4 SCALE: 1:1
E-mail:saudi@sz-signal.com		UNITS: mm	SHEET:1 OF 1