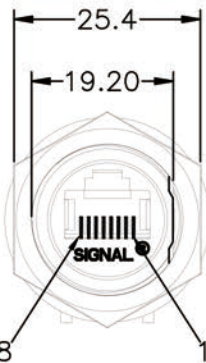



PROJECT NO:

SGNN2403064


REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2024/03/27	XD

 19.4 ± 0.1 $\varnothing 20.8 \pm 0.1$
RECOMMEND
PANEL CUT-OUT

P1



P2




DETAILED PRODUCT DESCRIPTION:
WATERPROOF CONNECTOR RATING IS IP67
THEY CAN NOT BE USED PERMANENTLY UNDER WATER
PER ISO-20653, IEC60529

ELECTRICAL CHARACTER

RATING VOLTAGE: 125V AC/DC
INSULATION RESISTANCE: >100MΩ
RATING CURRENT: 1.5A
CONTACT RESISTANCE OF CONNECTOR ≤40mΩ
MECHANICAL CHARACTERISTICS: MATING CYCLE >100CYCLES
OPERATING TEMPERATURE: -25°C ~ +85°C

ALL MATERIALS ARE ROHS COMPLIANT

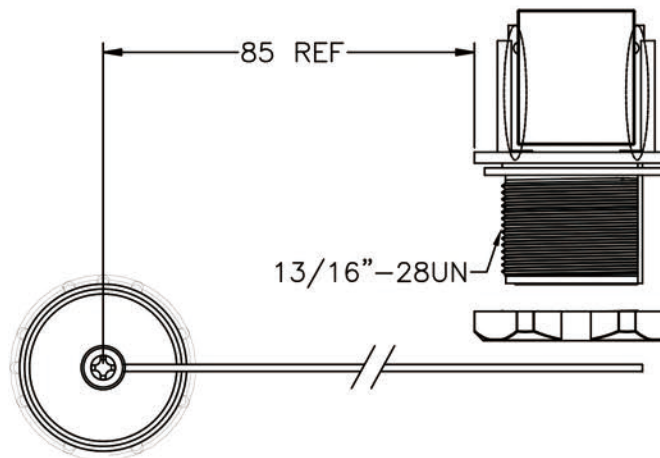

P1		P2	
8P8C/F		8P8C/F	
1	_____	1	_____
2	_____	2	_____
3	_____	3	_____
4	_____	4	_____
5	_____	5	_____
6	_____	6	_____
7	_____	7	_____
8	_____	8	_____



Shenzhen Signal Electronics co.,Ltd

DRAWN BY	DATE
CHECKED BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF SIGNAL COMPANY.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN
PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE RJ45 8P8C/F TO RJ45
8P8C/F ADAPTER(UL Mark)

SGN NO	940008-04-010	REV.	
DWG NO	SGNN2403064-1		
CUSTOMER			

TOLERANCES ARE:	THIRD ANGLE PROJECTION	
DECIMALES	ANGLES	
.x ±0.5	x.* ±2.0°	SIZE: A4
.xx ±0.2	x.* ±1.0°	UNITS: mm
	SCALE: 1:1	SHEET: 1 OF 1