

Detailed Product Description:

Waterproof connector rating is IP67

They can not be used permanently under water

Electrical character

Rating voltage: 300V AC/DC


Insulation resistance: >100MΩ

Rating current: 2A

Contact resistance ≤10mΩ

Operating temperature: -25°C ~ +85°C

*ALL MATERIALS ARE RoHS COMPLIANT.

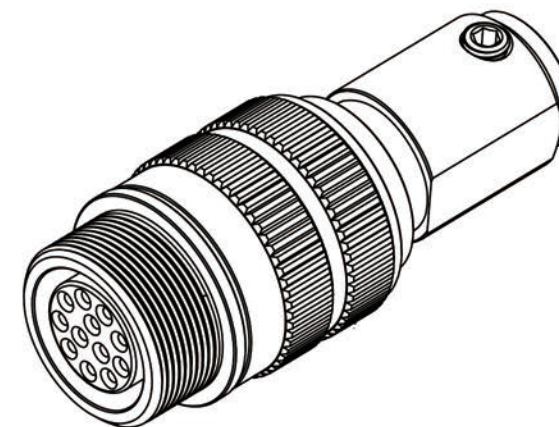

ShenZhen Signal Electronics co.,Ltd

DRAWN BY

DATE

CHECKED BY

DATE

CHECKED BY

DATE

APPROVED BY

DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE SAMW00 12PIN
FEMALE CONNECTOR

SGN NO 940012-21-001

DWG NO SGNYD2110080-2

CUSTOMER SWA-10W-12

TOLERANCES ARE:

DECIMALES

.x ±0.2

.xx ±0.10

ANGLES

.x' ±2.0'

.x' ±1.0'

THIRD ANGLE

PROJECTION

SIZE: A4

SCALE:

UNITS: mm

SHEET: 1 OF 1

REV.

SO