


REV	DESCRIPTION	DATE	APPROVED
S1	CREATED DRAWING	2022/06/21	ZK
S2	UPDATE DRAWING	2023/11/06	ZK

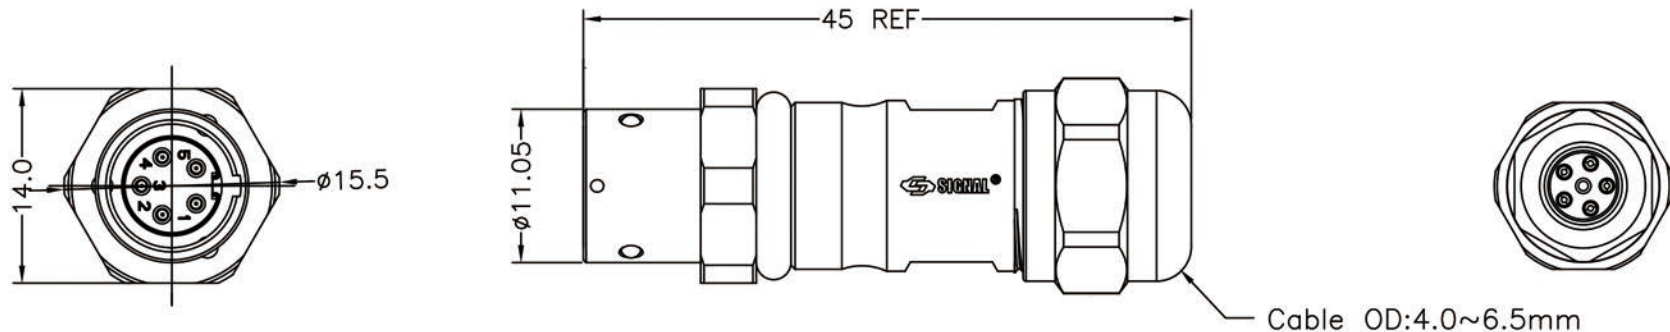




Detailed Product Description:  
 Waterproof connector rating is IP67  
 They can not be used permanently under water  
 Per ISO-20653,IEC60529

Electrical character  
 Rating voltage: 180V AC/DC  
 Insulation resistance: >5000MΩ  
 Rating current: 5A  
 Contact resistance ≤10mΩ

Other Specification  
 Contact PIN: Phosphor bronze with Gold plating.  
 Coupling nut/screw: Brass  
 Insulation plastic: TPU  
 Operating temperature: -25℃ ~ +85℃

\*ALL MATERIALS ARE RoHS COMPLIANT.

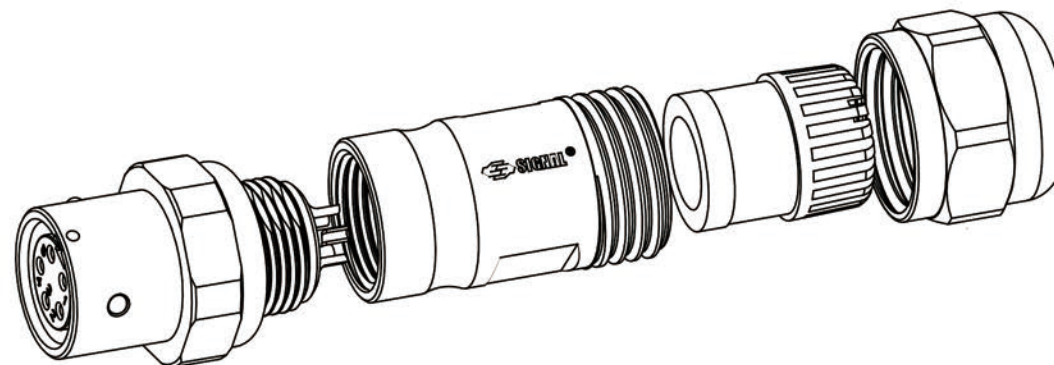

 ShenZhen Signal Electronics co.,Ltd		TITLE 5P/F REAR FASTENED CONNECTOR	
		SGN NO 940005-04-002	REV. S2
DRAWN BY	DATE	DWG NO SGNYD2205025-1	
CHECKED BY	DATE	CUSTOMER 22070173	
CHECKED BY	DATE		
APPROVED BY	DATE		
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE          PROPERTY OF SIGNAL COMPANY.          ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN          PERMISSION OF SIGNAL COMPANY IS PROHIBITED.</small>		TOLERANCES ARE:	THIRD ANGLE PROJECTION 
		DECIMALES .x ±0.2 .xx ±0.10	ANGLES x.* ±2.0° x.* ±1.0°
		SIZE: A4	UNITS: mm
		SCALE:	SHEET: 1 OF 1