



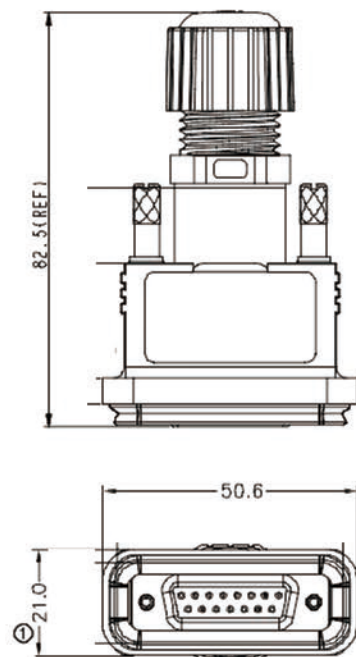

REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2019/05/04	ZZJ

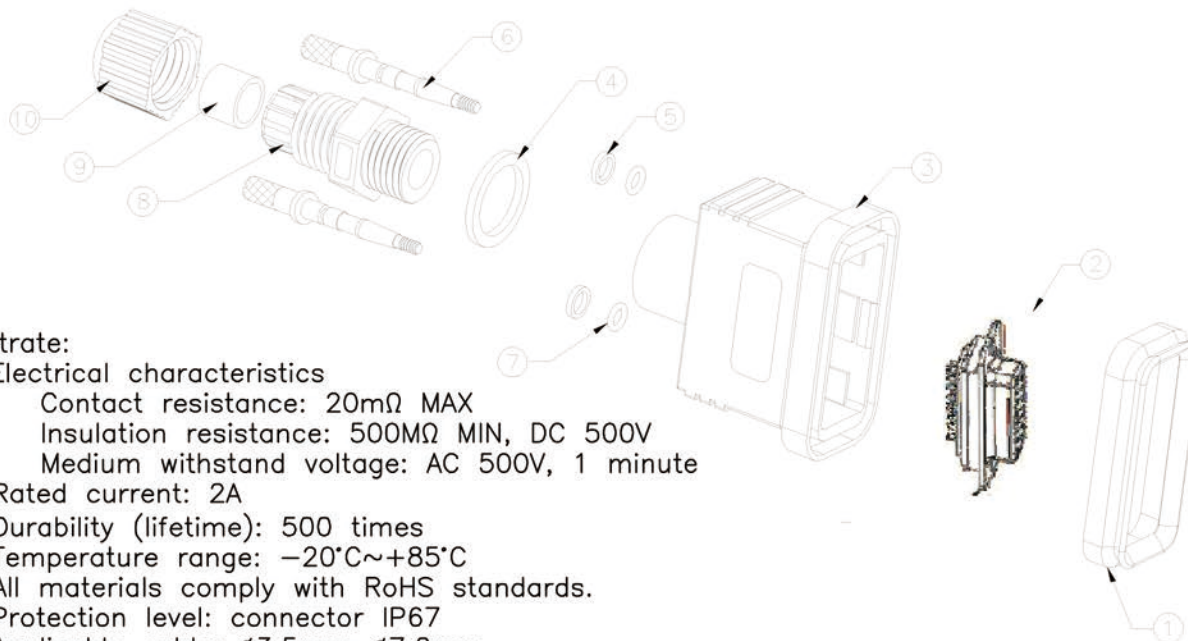

Illustrate:

1. Electrical characteristics
Contact resistance: 20mΩ MAX
Insulation resistance: 500MΩ MIN, DC 500V
Medium withstand voltage: AC 500V, 1 minute
2. Rated current: 2A
3. Durability (lifetime): 500 times
4. Temperature range: -20°C~+85°C
5. All materials comply with RoHS standards.
6. Protection level: connector IP67
7. Applicable cable: $\phi 3.5\text{mm}-\phi 7.0\text{mm}$



 SIGNAL®		TITLE DB 15/F Plastic assembly	
Shenzhen Signal Electronics Co., LTD		SGN NO 910115-02-011	REV.
DRAWN BY	DATE	DWG NO	S0
CHECKED BY	DATE	CUSTOMER	
APPROVED BY	DATE		
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		TOLERANCES ARE:	THIRD ANGLE PROJECTION 
		DECIMALES	ANGLES
		.x ±0.5	x' ±2.0'
		.xx ±0.20	.x' ±1.0'
		SIZE: A4	UNITS: mm
		SCALE:	SHEET: 1 OF 1