
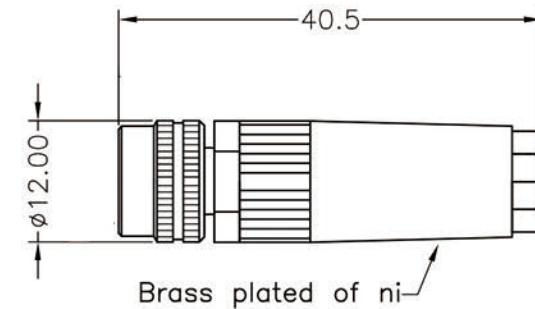




REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2018/01/28	HENG

Detailed Product Description:
 Waterproof connector rating is IP68
 They can not be used permanently under water.

Connector Electrical character
 Rating voltage: 30V AC/DC ,
 Insulation resistance: >100MΩ
 Rating current : 1.5A
 Contact resistance of connector ≤5mΩ
 Mechanical characteristics: mating / cycle >100 cycle
 Operating temperature: -25°C ~ +85°

*ALL MATERIALS ARE RoHS COMPLIANT.



 SIGNAL® ShenZhen Signal Electronics co.,Ltd		TITLE M8 A CODING 8P/F ASSEMBLY CONNECTOR	
		SGN NO 080108-02-001	REV.
DRAWN BY	DATE	DWG NO	S0
CHECKED BY	DATE	CUSTOMER	
APPROVED BY	DATE		
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		TOLERANCES ARE: DECIMALES .x ±0.5 .xx ±0.20 ANGLES x.' ±2.0' x.' ±1.0'	THIRD ANGLE PROJECTION  SIZE: A4 UNITS: mm SCALE: SHEET: 1 OF 1