

D-Sub Connectors



D-Sub Connectors

1.D-Sub Panel Mount (DB)

D001 - D006

2.D-Sub Panel Mount (HDB)

D007 - D012

3.D-Sub Field Writable Assembly

D013 - D019

4.D-Sub Adapter

D020 - D022


D-Sub Connectors

Male Panel Mount, PCB Type (DB)

Product figure




Scale diagram

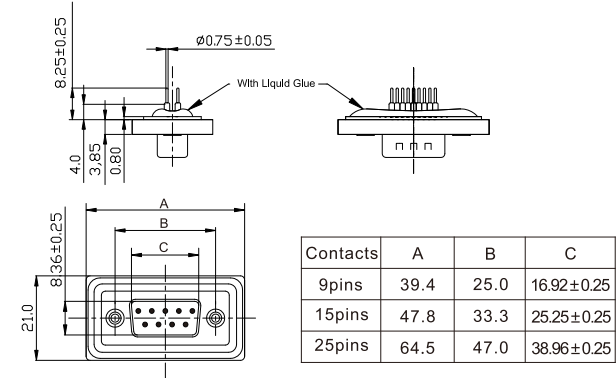


Contact layout/针孔排布 (Front view/前视图)


9pins



15pins



25pins



Order Data/订货信息

Contacts/芯数	Order No/订货号
9pins	910109-03-011
15pins	910115-03-011
25pins	910125-03-011

Specifications/技术参数

Number of contacts/芯数	9	15	25
Connector Style/连接器样式	D-Sub		
Termination/接线方式	PCB		
Protection degree/防护等级	IP67		
Operating temperature/工作温度	-25°C ~ +85°C		
Rated voltage/额定电压	300V		
Rated current (40°C)/额定电流	5A		
Contact resistance/接触阻抗	≤10mΩ		
Insulation resistance/绝缘阻抗	≥100MΩ		
Connector insert/胶芯材料	PA66+GF		
Connector contacts/端子材料	Brass with gold plated/黄铜镀金		
Shielding/是否屏蔽	Unshielded/否		


D-Sub Connectors

Female Panel Mount, PCB Type (DB)

Product figure




Scale diagram

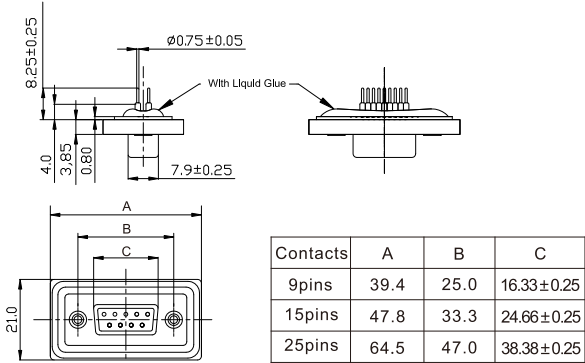


Contact layout/针孔排布 (Front view/前视图)


9pins



15pins



25pins



Order Data/订货信息

Contacts/芯数	Order No/订货号
9pins	910109-04-011
15pins	910115-04-011
25pins	910125-04-011

Specifications/技术参数

Number of contacts/芯数	9	15	25
Connector Style/连接器样式	D-Sub		
Termination/接线方式	PCB		
Protection degree/防护等级	IP67		
Operating temperature/工作温度	-25°C ~ +85°C		
Rated voltage/额定电压	300V		
Rated current (40°C)/额定电流	5A		
Contact resistance/接触阻抗	≤10mΩ		
Insulation resistance/绝缘阻抗	≥100MΩ		
Connector insert/胶芯材料	PA66+GF		
Connector contacts/端子材料	Brass with gold plated/黄铜镀金		
Shielding/是否屏蔽	Unshielded/否		


D-Sub Connectors

Male Panel Mount,
Angled Contacts PCB Type (DB)

Product figure




Scale diagram

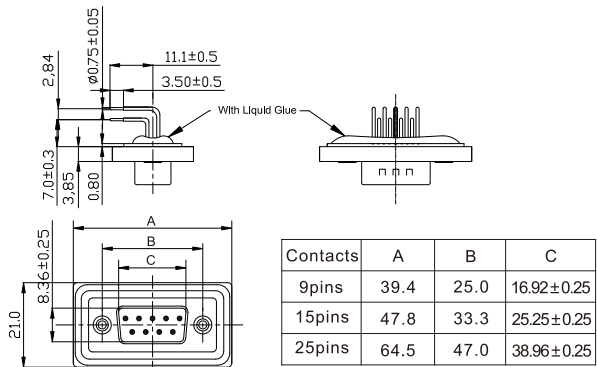


Contact layout/针孔排布 (Front view/前视图)


9pins



15pins



25pins



Order Data/订货信息

Contacts/芯数	Order No/订货号
9pins	910109-03-012
15pins	910115-03-012
25pins	910125-03-012

Specifications/技术参数

Number of contacts/芯数	9	15	25
Connector Style/连接器样式	D-Sub		
Termination/接线方式	PCB		
Protection degree/防护等级	IP67		
Operating temperature/工作温度	-25°C ~ +85°C		
Rated voltage/额定电压	300V		
Rated current (40°C)/额定电流	5A		
Contact resistance/接触阻抗	≤10mΩ		
Insulation resistance/绝缘阻抗	≥100MΩ		
Connector insert/胶芯材料	PA66+GF		
Connector contacts/端子材料	Brass with gold plated/黄铜镀金		
Shielding/是否屏蔽	Unshielded/否		


D-Sub Connectors

Female Panel Mount,
Angled Contacts PCB Type (DB)

Product figure




Scale diagram

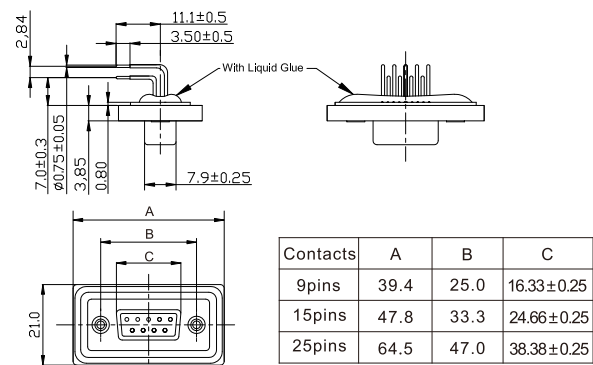


Contact layout/针孔排布 (Front view/前视图)


9pins



15pins



25pins



Order Data/订货信息

Contacts/芯数	Order No/订货号
9pins	910109-04-012
15pins	910115-04-012
25pins	910125-04-012

Specifications/技术参数


Number of contacts/芯数	9	15	25
Connector Style/连接器样式	D-Sub		
Termination/接线方式	PCB		
Protection degree/防护等级	IP67		
Operating temperature/工作温度	-25°C ~ +85°C		
Rated voltage/额定电压	300V		
Rated current (40°C)/额定电流	5A		
Contact resistance/接触阻抗	≤10mΩ		
Insulation resistance/绝缘阻抗	≥100MΩ		
Connector insert/胶芯材料	PA66+GF		
Connector contacts/端子材料	Brass with gold plated/黄铜镀金		
Shielding/是否屏蔽	Unshielded/否		

Male Panel Mount, Solder Type (DB)

Product figure




Scale diagram

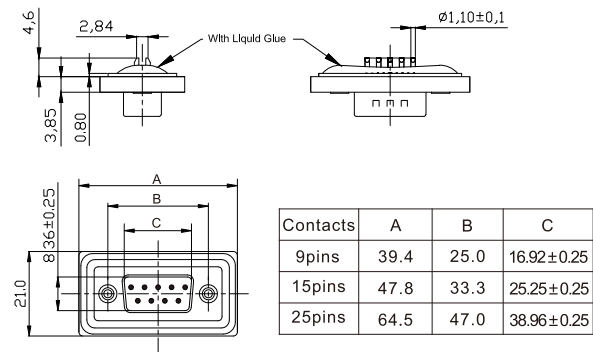


Contact layout/针孔排布 (Front view/前视图)


9pins



15pins



25pins



Order Data/订货信息

Contacts/芯数	Order No/订货号
9pins	910109-03-013
15pins	910115-03-013
25pins	910125-03-013

Specifications/技术参数

Number of contacts/芯数	9	15	25
Connector Style/连接器样式	D-Sub		
Termination/接线方式	solder		
Protection degree/防护等级	IP67		
Operating temperature/工作温度	-25°C ~ +85°C		
Rated voltage/额定电压	300V		
Rated current (40°C)/额定电流	5A		
Contact resistance/接触阻抗	≤10mΩ		
Insulation resistance/绝缘阻抗	≥100MΩ		
Connector insert/胶芯材料	PA66+GF		
Connector contacts/端子材料	Brass with gold plated/黄铜镀金		
Shielding/是否屏蔽	Unshielded/否		


D-Sub Connectors

Female Panel Mount, Solder Type (DB)

Product figure




Scale diagram

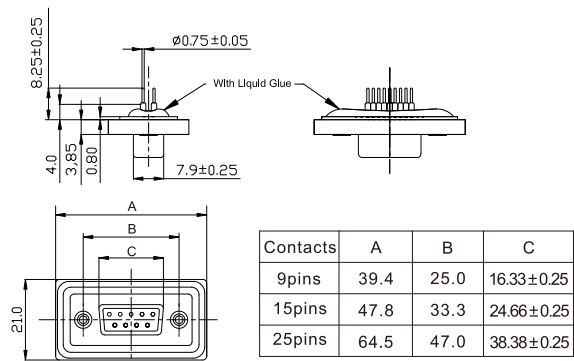


Contact layout/针孔排布 (Front view/前视图)


9pins



15pins



25pins



Order Data/订货信息

Contacts/芯数	Order No/订货号
9pins	910109-04-013
15pins	910115-04-013
25pins	910125-04-013

Specifications/技术参数

Number of contacts/芯数	9	15	25
Connector Style/连接器样式	D-Sub		
Termination/接线方式	solder		
Protection degree/防护等级	IP67		
Operating temperature/工作温度	-25°C ~ +85°C		
Rated voltage/额定电压	300V		
Rated current (40°C)/额定电流	5A		
Contact resistance/接触阻抗	≤10mΩ		
Insulation resistance/绝缘阻抗	≥100MΩ		
Connector insert/胶芯材料	PA66+GF		
Connector contacts/端子材料	Brass with gold plated/黄铜镀金		
Shielding/是否屏蔽	Unshielded/否		


D-Sub Connectors

Male Panel Mount, PCB Type (HDB)

Product figure




Scale diagram

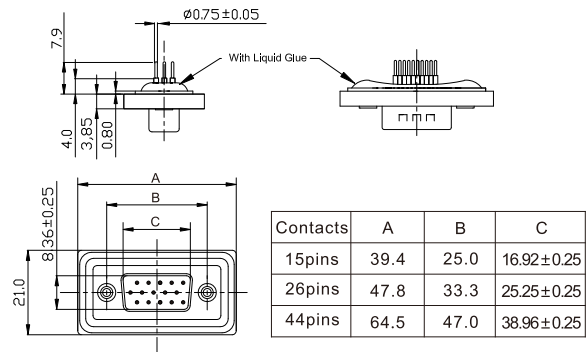


Contact layout/针孔排布 (Front view/前视图)


15pins



26pins



44pins



Order Data/订货信息

Contacts/芯数	Order No/订货号
15pins	910215-03-011
26pins	910226-03-011
44pins	910244-03-011

Specifications/技术参数

Number of contacts/芯数	15	26	44
Connector Style/连接器样式	D-Sub		
Termination/接线方式	PCB		
Protection degree/防护等级	IP67		
Operating temperature/工作温度	-25°C ~ +85°C		
Rated voltage/额定电压	300V		
Rated current (40°C)/额定电流	5A		
Contact resistance/接触阻抗	≤10mΩ		
Insulation resistance/绝缘阻抗	≥100MΩ		
Connector insert/胶芯材料	PA66+GF		
Connector contacts/端子材料	Brass with gold plated/黄铜镀金		
Shielding/是否屏蔽	Unshielded/否		


D-Sub Connectors

Female Panel Mount, PCB Type (HDB)

Product figure




Scale diagram

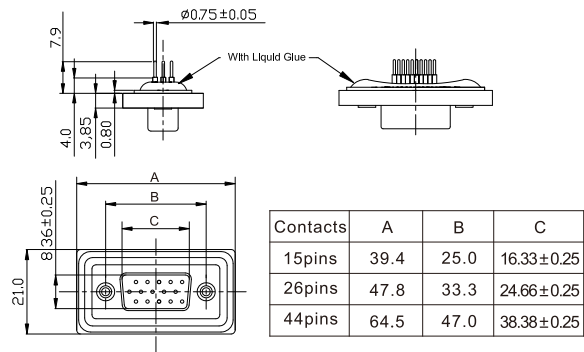


Contact layout/针孔排布 (Front view/前视图)


15pins



26pins



44pins



Order Data/订货信息

Contacts/芯数	Order No/订货号
15pins	910215-04-011
26pins	910226-04-011
44pins	910244-04-011

Specifications/技术参数

Number of contacts/芯数	15	26	44
Connector Style/连接器样式	D-Sub		
Termination/接线方式	PCB		
Protection degree/防护等级	IP67		
Operating temperature/工作温度	-25°C ~ +85°C		
Rated voltage/额定电压	300V		
Rated current (40°C)/额定电流	5A		
Contact resistance/接触阻抗	≤10mΩ		
Insulation resistance/绝缘阻抗	≥100MΩ		
Connector insert/胶芯材料	PA66+GF		
Connector contacts/端子材料	Brass with gold plated/黄铜镀金		
Shielding/是否屏蔽	Unshielded/否		


D-Sub Connectors

Male Panel Mount,
Angled Contacts PCB Type (HDB)

Product figure




Scale diagram

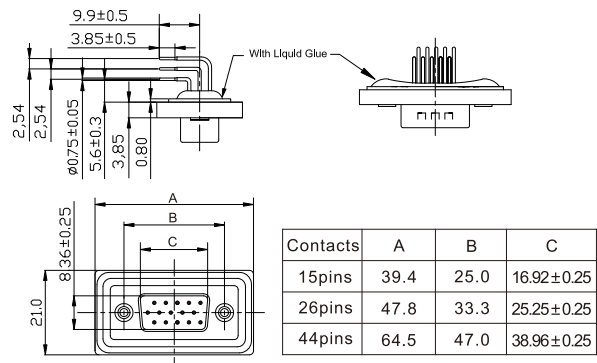


Contact layout/针孔排布 (Front view/前视图)


15pins



26pins



44pins



Order Data/订货信息

Contacts/芯数	Order No/订货号
15pins	910215-03-012
26pins	910226-03-012
44pins	910244-03-012

Specifications/技术参数

Number of contacts/芯数	15	26	44
Connector Style/连接器样式	D-Sub		
Termination/接线方式	PCB		
Protection degree/防护等级	IP67		
Operating temperature/工作温度	-25°C ~ +85°C		
Rated voltage/额定电压	300V		
Rated current (40°C)/额定电流	5A		
Contact resistance/接触阻抗	≤10mΩ		
Insulation resistance/绝缘阻抗	≥100MΩ		
Connector insert/胶芯材料	PA66+GF		
Connector contacts/端子材料	Brass with gold plated/黄铜镀金		
Shielding/是否屏蔽	Unshielded/否		


D-Sub Connectors

Female Panel Mount,
Angled Contacts PCB Type (HDB)

Product figure




Scale diagram

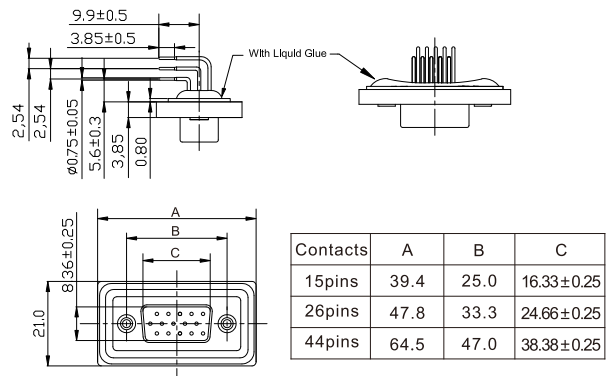


Contact layout/针孔排布 (Front view/前视图)


15pins



26pins



44pins



Order Data/订货信息

Contacts/芯数	Order No/订货号
15pins	910215-04-012
26pins	910226-04-012
44pins	910244-04-012

Specifications/技术参数


Number of contacts/芯数	15	26	44
Connector Style/连接器样式	D-Sub		
Termination/接线方式	PCB		
Protection degree/防护等级	IP67		
Operating temperature/工作温度	-25°C ~ +85°C		
Rated voltage/额定电压	300V		
Rated current (40°C)/额定电流	5A		
Contact resistance/接触阻抗	≤10mΩ		
Insulation resistance/绝缘阻抗	≥100MΩ		
Connector insert/胶芯材料	PA66+GF		
Connector contacts/端子材料	Brass with gold plated/黄铜镀金		
Shielding/是否屏蔽	Unshielded/否		

Male Panel Mount, Solder Type (HDB)

Product figure




Scale diagram

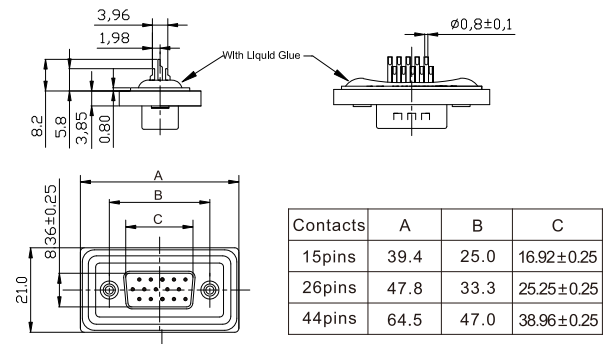


Contact layout/针孔排布 (Front view/前视图)


15pins



26pins



44pins



Order Data/订货信息

Contacts/芯数	Order No/订货号
15pins	910215-03-013
26pins	910226-03-013
44pins	910244-03-013

Specifications/技术参数

Number of contacts/芯数	15	26	44
Connector Style/连接器样式	D-Sub		
Termination/接线方式	Solder		
Protection degree/防护等级	IP67		
Operating temperature/工作温度	-25°C ~ +85°C		
Rated voltage/额定电压	300V		
Rated current (40°C)/额定电流	5A		
Contact resistance/接触阻抗	≤10mΩ		
Insulation resistance/绝缘阻抗	≥100MΩ		
Connector insert/胶芯材料	PA66+GF		
Connector contacts/端子材料	Brass with gold plated/黄铜镀金		
Shielding/是否屏蔽	Unshielded/否		


D-Sub Connectors

Female Panel Mount, Solder Type (HDB)

Product figure




Scale diagram

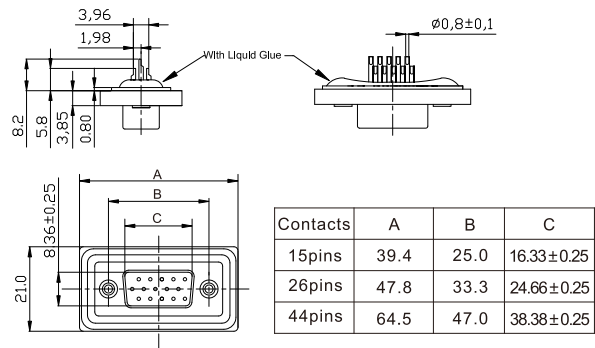


Contact layout/针孔排布 (Front view/前视图)


15pins



26pins



44pins



Order Data/订货信息

Contacts/芯数	Order No/订货号
15pins	910215-04-013
26pins	910226-04-013
44pins	910244-04-013

Specifications/技术参数

Number of contacts/芯数	15	26	44
Connector Style/连接器样式	D-Sub		
Termination/接线方式	Solder		
Protection degree/防护等级	IP67		
Operating temperature/工作温度	-25°C ~ +85°C		
Rated voltage/额定电压	300V		
Rated current (40°C)/额定电流	5A		
Contact resistance/接触阻抗	≤10mΩ		
Insulation resistance/绝缘阻抗	≥100MΩ		
Connector insert/胶芯材料	PA66+GF		
Connector contacts/端子材料	Brass with gold plated/黄铜镀金		
Shielding/是否屏蔽	Unshielded/否		


D-Sub Connectors

Male Field Wirable Assembly,
Solder Type (DB)

Product figure




Scale diagram

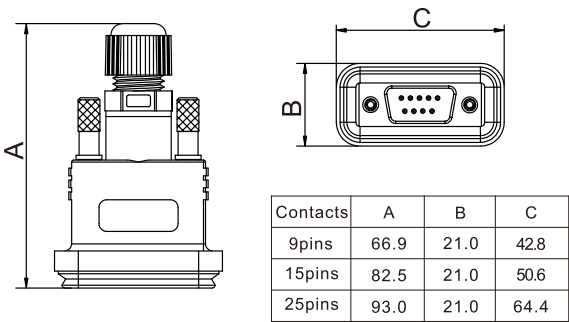


Contact layout/针孔排布 (Front view/前视图)


9pins



15pins



25pins



Order Data/订货信息

Contacts/芯数	Order No/订货号
9pins	910109-01-011
15pins	910115-01-011
25pins	910125-01-011

Specifications/技术参数

Number of contacts/芯数	9	15	25
Connector Style/连接器样式	D-Sub		
Termination/接线方式	Solder		
Cable OD/线材直径	3.5-7.0mm	6.0-10.0mm	
Protection degree/防护等级	IP67		
Operating temperature/工作温度	-25°C~+85°C		
Rated voltage/额定电压	300V		
Rated current (40°C)/额定电流	5A		
Contact resistance/接触阻抗	≤10mΩ		
Insulation resistance/绝缘阻抗	≥100MΩ		
Connector insert/胶芯材料	PA66+GF		
Connector contacts/端子材料	Brass with gold plated/黄铜镀金		
Screw/螺丝材料	Brass with nickel plated/黄铜镀镍		
Shielding/是否屏蔽	Unshielded/否		


D-Sub Connectors

Female Field Wirable Assembly,
Solder Type (DB)

Product figure




Scale diagram

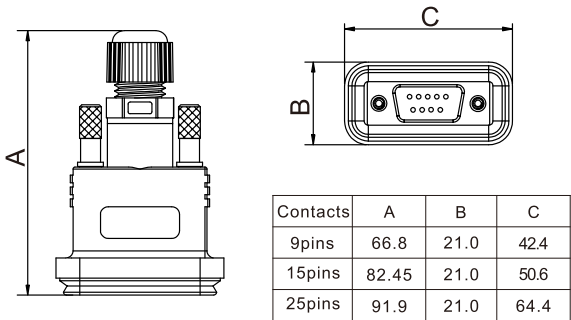


Contact layout/针孔排布 (Front view/前视图)


9pins



15pins



25pins



Order Data/订货信息

Contacts/芯数	Order No/订货号
9pins	910109-02-011
15pins	910115-02-011
25pins	910125-02-011

Specifications/技术参数


Number of contacts/芯数	9	15	25
Connector Style/连接器样式	D-Sub		
Termination/接线方式	Solder		
Cable OD/线材直径	3.5-7.0mm	6.0-10.0mm	
Protection degree/防护等级	IP67		
Operating temperature/工作温度	-25°C~+85°C		
Rated voltage/额定电压	300V		
Rated current (40°C)/额定电流	5A		
Contact resistance/接触阻抗	≤10mΩ		
Insulation resistance/绝缘阻抗	≥100MΩ		
Connector insert/胶芯材料	PA66+GF		
Connector contacts/端子材料	Brass with gold plated/黄铜镀金		
Screw/螺丝材料	Brass with nickel plated/黄铜镀镍		
Shielding/是否屏蔽	Unshielded/否		

Male Field Wirable Assembly (HDB)

Product figure




Scale diagram

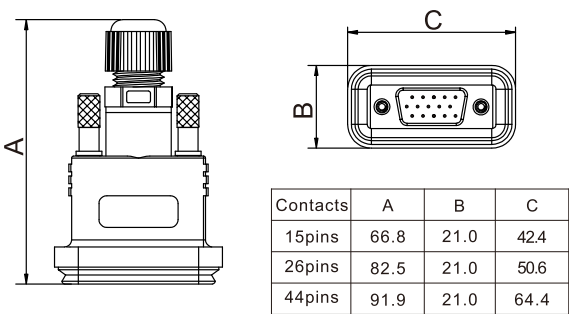


Contact layout/针孔排布 (Front view/前视图)


15pins



26pins



44pins



Order Data/订货信息

Contacts/芯数	Order No/订货号
15pins	910215-01-011
26pins	910226-01-011
44pins	910244-01-011

Specifications/技术参数

Number of contacts/芯数	15	26	44
Connector Style/连接器样式	D-Sub		
Termination/接线方式	Solder		
Cable OD/线材直径	3.5-7.0mm	6.0-10.0mm	
Protection degree/防护等级	IP67		
Operating temperature/工作温度	-25°C~+85°C		
Rated voltage/额定电压	300V		
Rated current (40°C)/额定电流	5A		
Contact resistance/接触阻抗	≤10mΩ		
Insulation resistance/绝缘阻抗	≥100MΩ		
Connector insert/胶芯材料	PA66+GF		
Connector contacts/端子材料	Brass with gold plated/黄铜镀金		
Screw/螺丝材料	Brass with nickel plated/黄铜镀镍		
Shielding/是否屏蔽	Unshielded/否		


D-Sub Connectors

Female Field Wirable Assembly (HDB)

Product figure




Scale diagram

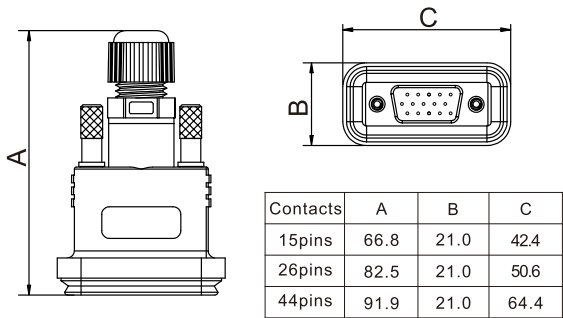


Contact layout/针孔排布 (Front view/前视图)


15pins



26pins



44pins



Order Data/订货信息

Contacts/芯数	Order No/订货号
15pins	910215-02-011
26pins	910226-02-011
44pins	910244-02-011

Specifications/技术参数

Number of contacts/芯数	15	26	44
Connector Style/连接器样式	D-Sub		
Termination/接线方式	Solder		
Cable OD/线材直径	3.5-7.0mm	6.0-10.0mm	
Protection degree/防护等级	IP67		
Operating temperature/工作温度	-25°C~+85°C		
Rated voltage/额定电压	300V		
Rated current (40°C)/额定电流	5A		
Contact resistance/接触阻抗	≤10mΩ		
Insulation resistance/绝缘阻抗	≥100MΩ		
Connector insert/胶芯材料	PA66+GF		
Connector contacts/端子材料	Brass with gold plated/黄铜镀金		
Screw/螺丝材料	Brass with nickel plated/黄铜镀镍		
Shielding/是否屏蔽	Unshielded/否		


D-Sub Connectors

Male/Female Field Wirable Assembly
Shell (DB9/HDB15)

Product figure




Scale diagram

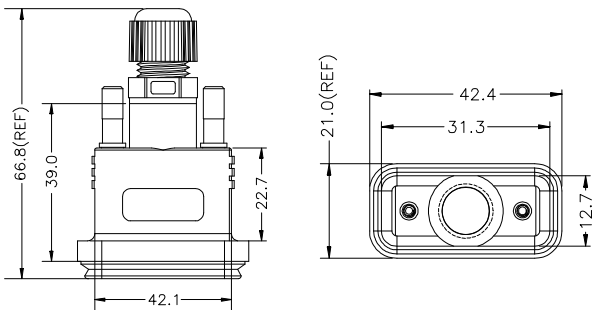

Contact layout/针孔排布 (Front view/前视图)

DB9/HDB15




Order Data/订货信息

Contacts/芯数	Order No/订货号
DB9/HDB15	910000-00-001

Specifications/技术参数

Number of contacts/芯数	DB9/HDB15
Connector Style/连接器样式	D-Sub
Cable OD/线材直径	3.5-7.0mm
Protection degree/防护等级	IP67
Operating temperature/工作温度	-25°C~+85°C
Connector shell/胶壳材料	PA66+GF
Screw/螺丝材料	Brass with nickel plated/黄铜镀镍
Shielding/是否屏蔽	Unshielded/否

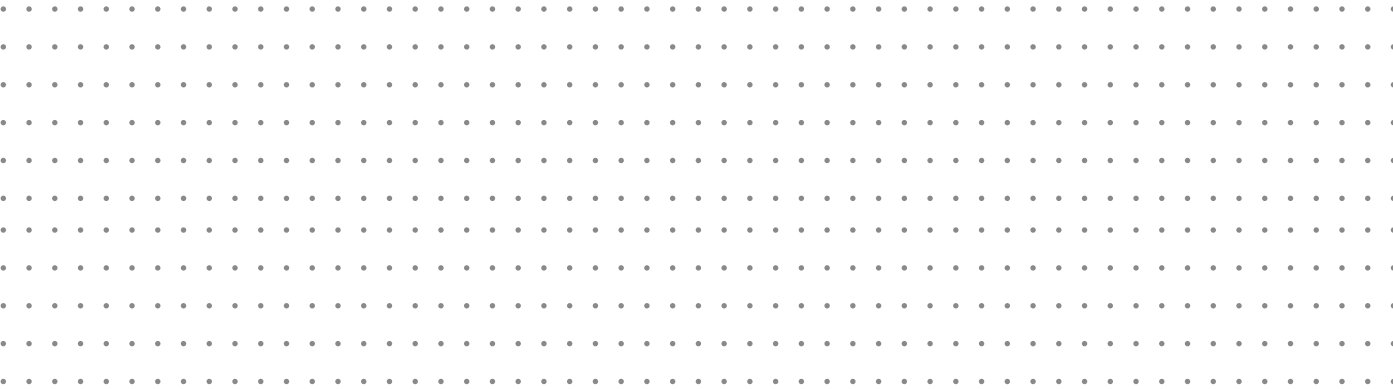


D-Sub Connectors

Male/Female Field Wirable Assembly
Shell (DB15/HDB26)

Product figure




Scale diagram

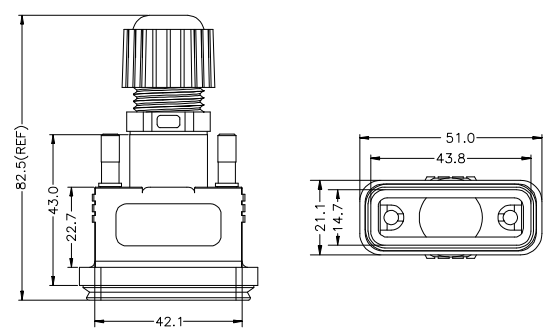

Contact layout/针孔排布 (Front view/前视图)

DB15/HDB26




Order Data/订货信息

Contacts/芯数	Order No/订货号
DB15/HDB26	910000-00-002

Specifications/技术参数

Number of contacts/芯数	DB15/HDB26
Connector Style/连接器样式	D-Sub
Cable OD/线材直径	6.0-10.0mm
Protection degree/防护等级	IP67
Operating temperature/工作温度	-25°C ~ +85°C
Connector shell/胶壳材料	PA66+GF
Screw/螺丝材料	Brass with nickel plated/黄铜镀镍
Shielding/是否屏蔽	Unshielded/否

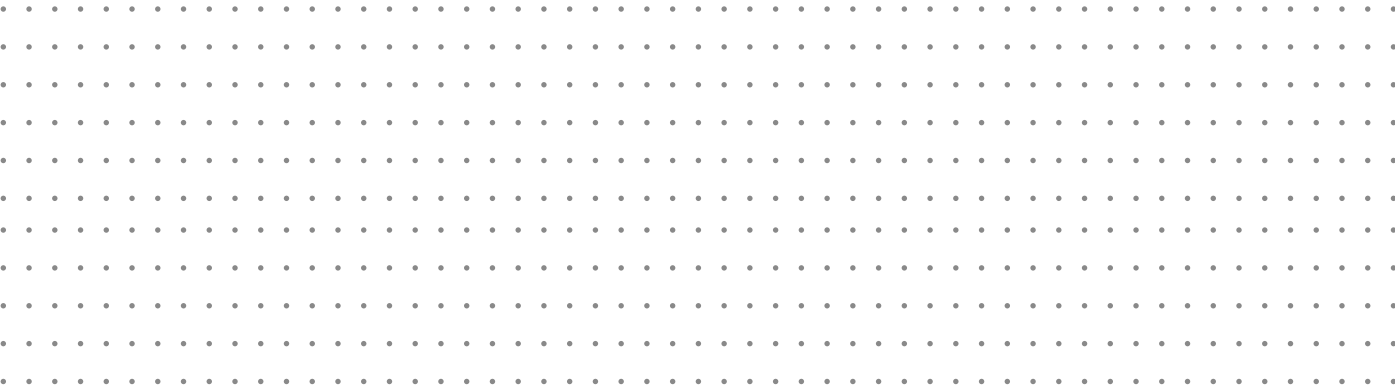


D-Sub Connectors

Male/Female Field Wirable Assembly
Shell (DB25/HDB44)

Product figure




Scale diagram

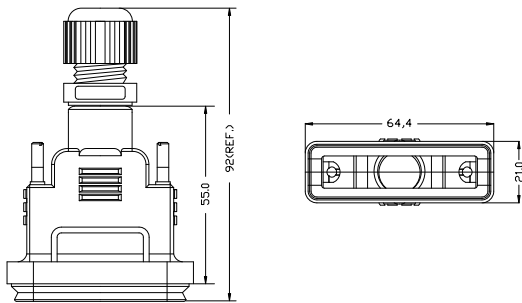

Contact layout/针孔排布 (Front view/前视图)

DB25/HDB44




Order Data/订货信息

Contacts/芯数	Order No/订货号
DB25/HDB44	910000-00-003

Specifications/技术参数

Number of contacts/芯数	DB25/HDB44
Connector Style/连接器样式	D-Sub
Cable OD/线材直径	6.0-10.0mm
Protection degree/防护等级	IP67
Operating temperature/工作温度	-25°C~+85°C
Connector shell/胶壳材料	PA66+GF
Screw/螺丝材料	Brass with nickel plated/黄铜镀镍
Shielding/是否屏蔽	Unshielded/否

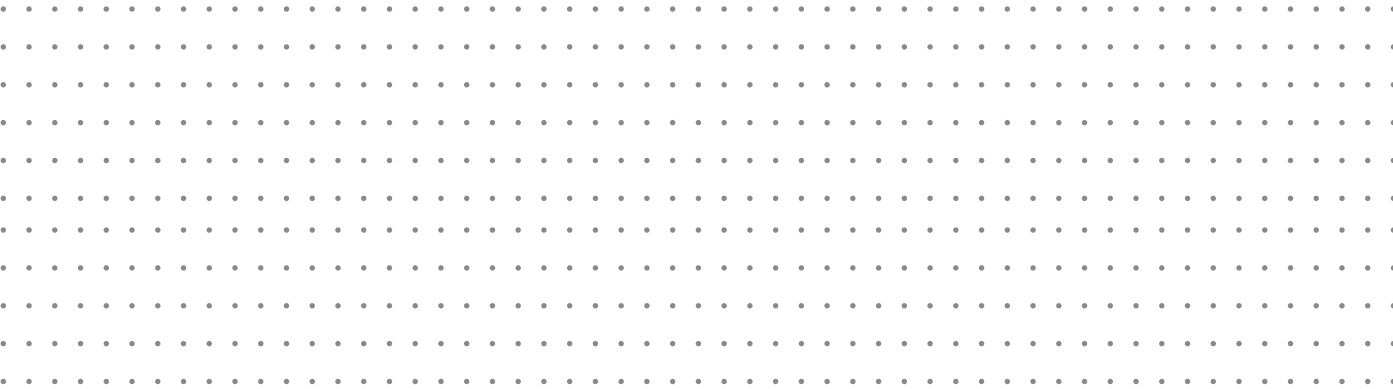


D-Sub Connectors

Male to Female Adapter Connectors

Product figure



Scale diagram



Contact layout/针孔排布 (Front view/前视图)



Order Data/订货信息

Contacts/芯数	Order No/订货号
DB9	940000-00-695

Specifications/技术参数

Number of contacts/芯数	9
Connector Style/连接器样式	D-Sub
Termination/接线方式	Screw clamp/锁螺丝
Cable OD/线材直径	7.6-8.4mm
Protection degree/防护等级	IP40
Operating temperature/工作温度	-25°C~+85°C
Rated voltage/额定电压	5V
Rated current (40°C)/额定电流	100mA
Contact resistance/接触阻抗	≤10mΩ
Insulation resistance/绝缘阻抗	≥100MΩ
Connector insert/胶芯材料	PA66+GF
Connector contacts/端子材料	Brass with gold plated/黄铜镀金
Screw/螺丝材料	Brass with nickel plated/黄铜镀镍


D-Sub Connectors

D-sub to M12 Adapter Connectors


Product figure



Scale diagram



Contact layout/针孔排布 (Front view/前视图)

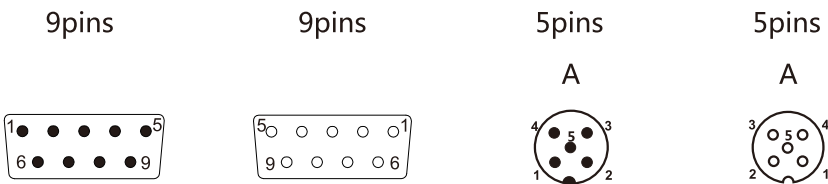

Order Data/订货信息

Contacts/芯数	Order No/订货号
DB9-M12 5P	120105-10-080

Specifications/技术参数

Number of contacts/芯数	DB9-M12 5P
Connector Style/连接器样式	D-Sub
Termination/接线方式	Solder/焊接
Protection degree/防护等级	IP40
Operating temperature/工作温度	-25°C ~ +85°C
Rated voltage/额定电压	5V
Rated current (40°C)/额定电流	100mA
Contact resistance/接触阻抗	≤10mΩ
Insulation resistance/绝缘阻抗	≥100MΩ
Connector insert/胶芯材料	PA66+GF
Connector contacts/端子材料	Brass with gold plated/黄铜镀金
Screw/螺丝材料	Brass with nickel plated/黄铜镀镍


D-Sub Connectors

D-sub to M12 Adapter Connectors


Product figure



Scale diagram



Contact layout/针孔排布 (Front view/前视图)

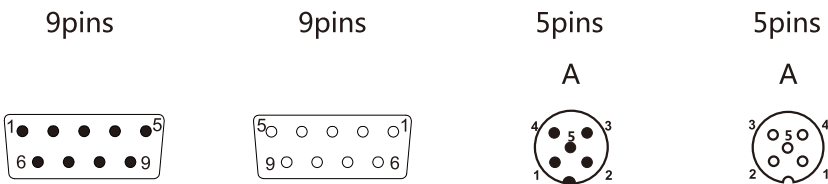

Order Data/订货信息

Contacts/芯数	Order No/订货号
DB9-M12 5P	120105-10-081

Specifications/技术参数

Number of contacts/芯数	DB9-M12 5P
Connector Style/连接器样式	D-Sub to M12
Protection degree/防护等级	IP40
Operating temperature/工作温度	-25°C~+85°C
Rated voltage/额定电压	5V
Rated current (40°C)/额定电流	100mA
Contact resistance/接触阻抗	≤5mΩ
Insulation resistance/绝缘阻抗	≥100MΩ
Connector insert/胶芯材料	PA66+GF
Connector contacts/端子材料	Brass with gold plated/黄铜镀金

