



M12 Push-Pull High-efficiency



New Products



深圳市盛格纳电子有限公司(总部) Shenzhen Signal Electronics Co., Ltd (HQ)

Add/地址: Building 13-15, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, Guangdong, China
深圳市光明区马田街道合水口社区下朗工业区13-15栋
Tel/电话: +86 0755-29886112 / +86 0755-29886179
Email/邮箱: sales@sz-signal.com / info@sz-signal.com
Web/网址: www.sz-signal.com / www.signal-connector.com

深圳市盛格纳电子有限公司南京分公司 Shenzhen Signal Electronics Co., Ltd Nanjing Branch

Add/地址: B13, 12/F, Building 2, Yuhua Living Room, No. 109 Software Avenue, Yuhuatai District, Nanjing, Jiangsu, China
江苏省南京市雨花台区软件大道109号雨花客厅2栋12楼B13

湖南盛格纳工业科技有限公司 Hunan Signal Industrial Technology Co., Ltd

Add/地址: Kechuang Industrial Park, Nanzhou Town, Lukou District, Zhuzhou, Hunan, China
湖南省株洲市渌口区南洲镇科创产业园
Tel/电话: +86 0371-27671678
Email/邮箱: Sales02@sz-signal.com
Web/网址: www.signal168.com

盛格纳国际香港有限公司 SIGNAL Group (HK) Co., Limited



官网 公众号 视频号 抖音号



www.sz-signal.com / www.signal-connector.com / www.signal168.com



M12 Push-Pull

您信赖的连接器&连接线专家!
www.signal-conector.com

80%

即插即拔, 无需安装工具
节省80%安装时间

Easy Plug-in and Pull-out
No installation tools required
Save 80% Installation Time



M12 Push-Pull


Your Reliable Partner in Connectivity!
www.signal-conector.com

工厂规模化生产
先进的制程管理技术和成本控制能力
Factory-based large-scale production
Advanced process management technology
and cost control capabilities.



01

符合IEC 61076-2-010设计规范, 通用国际标准
适用IEC 61076-2-101/109/111/113无需更改设计和测试要求
Conforms to IEC 61076-2-101 design specifications.
Applies IEC 61076-2-101/109/111/113 without changes to design and test requirements.

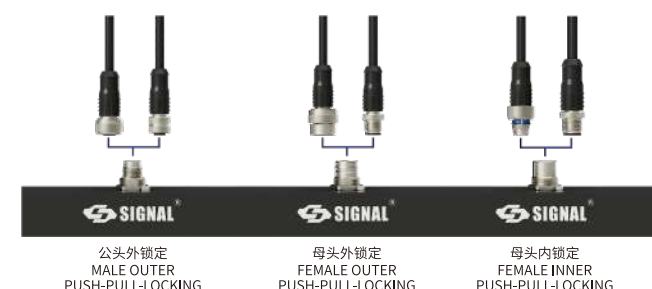

02

板端兼容, 同时兼容螺纹锁定和推拉自锁
可以自由切换不影响性能
Compatible with board ends and both thread locking and push-pull self-locking, freely switchable without affecting performance.

03

防护等级IP67
耐振动冲击性符合IEC 60512要求
Protection class IP67, vibration and shock resistance in accordance with IEC 60512 requirements.



04

适用于多数量复杂环境的布线场景
Suitable for wiring scenarios with varied components and complex environments.



产品参数 Product Parameters

-3~17 Pin
-IP67/IP68防护等级
-工作温度: -25°C~+85°C
-A/B/C/D/S/T/X/K/Y/L/E/F/M-Coding防呆接口
-注塑成型式、面板式
-推拉自锁式锁紧方式
-线材外被PVC/PUR可选
-Profibus、DeviceNet、CAN-BUS、Ethernet/IP、PROFINET、EtherCAT等(线径OD最大可达16mm²)
线材可用, 以及客制化尾部处理方式

-3~17 Pin
-IP67/IP68 protection level
-Operating temperature: -25°C~+85°C
-A/B/C/D/S/T/X/K/Y/L/E/F/M-Coding
-Moulded on cable、Panel-mount
-Push-pull self-locking locking method
-Optional PVC or PUR.
-Profibus, DeviceNet, CAN-BUS, Ethernet/IP, PROFINET, EtherCAT(wire diameter up to 24AWG)
-Wire available and Customized cable end treatments available.

Coding

