


PROJECT NO:  
SGNYD2309058


REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2023/09/15	W N

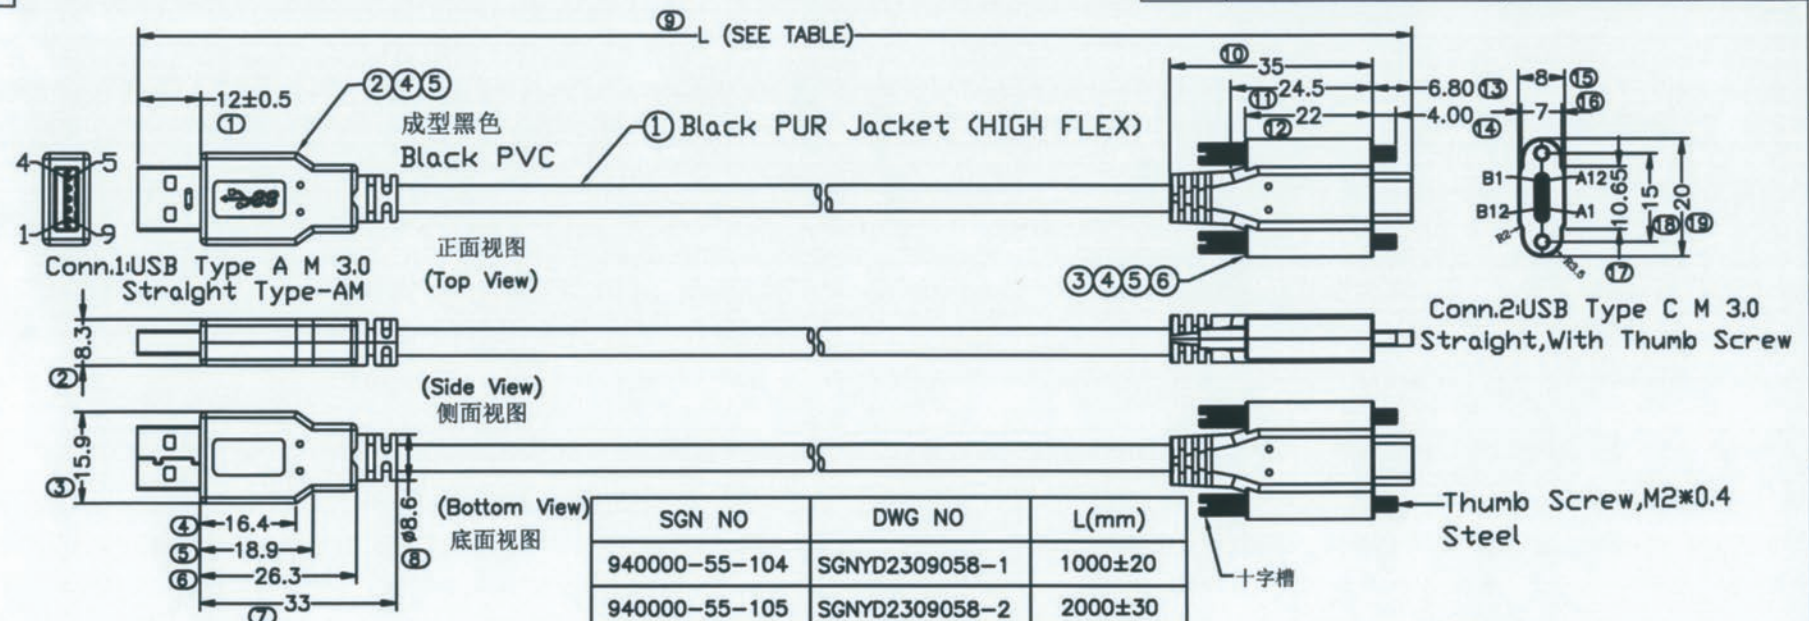

SGN NO	DWG NO	L(mm)
940000-55-104	SGNYD2309058-1	1000±20
940000-55-105	SGNYD2309058-2	2000±30
940000-55-106	SGNYD2309058-3	3000±50
940000-55-107	SGNYD2309058-4	5000±50

**Note:**  
**1. Electronic Test (Electrical Performance):**  
 电气测试参数条件  
 100% Open & Short & Mis-wire Test  
 百分之百断线, 短路, 错位测试  
 Contact Resistance: L 1~3M < 3Ω; 5M < 4Ω  
 导通阻抗: 1~3米最大3Ω; 5米4Ω  
 Insulation Resistance: L < 3M 50MΩ; 5M: 20MΩ  
 绝缘阻抗: 1~3米最小50MΩ; 5M: 20MΩ  
 Insulation Voltage: 300V DC/10ms  
 绝缘电压 (直流耐压): DC300/10毫秒  
**2. RoHS / REACH Compliant Certified**  
 环保符合RoHS & REACH要求

**3. Maximum voltage: 5V ; Maximum current: 3A**  
 (最大电压5V; 最大电流3A)  
**4. USB SuperSpeed: USB3.1 GEN1 5Gbps**  
 (USB数据传输: GEN1 5Gbps)  
**5. Type C为手转铁螺丝, 尾部压钢化十字槽, 前M2牙, 镀镍**

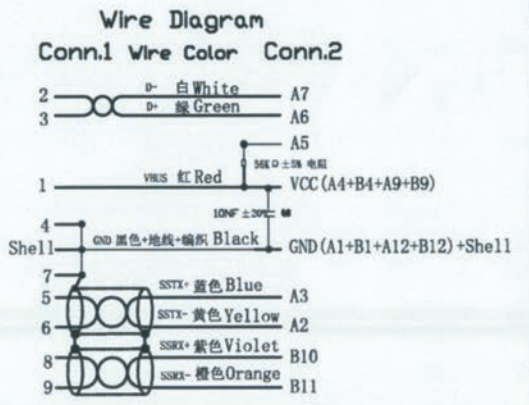

ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT
⑥	N/A	Metal Thumb Screw, M2*0.4, Nickel Plated	2	PCS
⑤	N/A	BLACK PVC 35PA	12	g
④	N/A	LE-PE	3	g
③	N/A	USB3.1 Type C M. Black Insulator. Shell Nickel Plated. Contact Gold 1u" with PCBA R=56K C=10nf	1	SET
②	N/A	USB3.0 Type A M. Blue Insulator. Shell Nickel Plated. Contact Gold 1u"	1	SET
①	N/A	UL20554 (1P#30+D+AL+HM)*2U+1P#30+2C#24+AL+B(TC 1%/0.08)+Black Matt PUR Jacket OD5.0mm	1	PCS

**SIGNAL**  
 Shenzhen Signal Electronics co., Ltd

DRAWN BY		DATE	
CHECKED BY		DATE	
CHECKED BY		DATE	
APPROVED BY		DATE	

TITLE: USB 3.0 A M TO USB 3.0 TYPE-C M WITH SCREW CABLE

SGN NO	SEE TABLE	REV.
DWG NO	SEE TABLE-443	
CUSTOMER		S0

TOLERANCES ARE:  
 DECIMALES: .x ±0.5, .xx ±0.20  
 ANGLES: x' ±2.0', .x' ±1.0'

THIRD ANGLE PROJECTION  
 SIZE: A4  
 UNITS: mm  
 SCALE: 1:1  
 SHEET: 1 OF 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.