
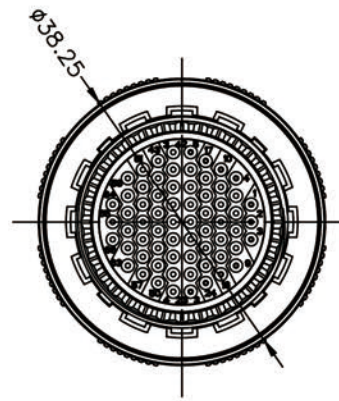
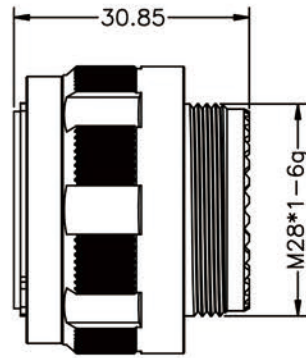


PROJECT NO:



XXX

REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2018/7/7	CRB

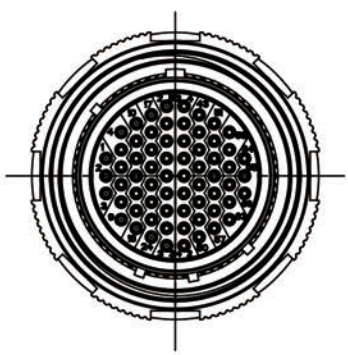

- NOTE
- 1.STANDARD: BASED ON MIL-DTL-38999 SERIES III
 - 2.SHELL MATERIAL: ALUMINIUM
 - 3.SHELL PLATING: NICKEL
 - 4.INSULATOR: THERMOPLASTIC
 - 5.CONTACTS: COPPER ALLOY
 - 6.SEALS & GROMMET: SILICON ELASTOMER
 - 7.CONTACT PLATING: GOLD OVER COPPER ALLOY 1U" MINIMUM
 - 8.DURABILITY: 500 MATING CYCLES
 - 9.TEMPERATURE RANGE: -45°C TO +150°C
 - 10.SALT SPRAY: 48 HOURS

ALL MATERIALS ARE RoHS COMPLIANT

 SIGNAL [®]		TITLE ALUMINIUM PLUG, WITH MALE CONTACTS(D3899926FF35PN)	
		SGN NO 940066-00-002	REV.
DRAWN BY	DATE	DWG NO	
CHECKED BY	DATE	CUSTOMER	
APPROVED BY	DATE	S0	
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.</small>		TOLERANCES ARE: DECIMALES .x ±0.5 .xx ±0.20	ANGLES x.* ±2.0° .x.* ±1.0°
		THIRD ANGLE PROJECTION 	SIZE: A4 UNITS: mm SCALE: SHEET: 1 OF 1